

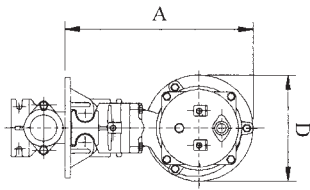
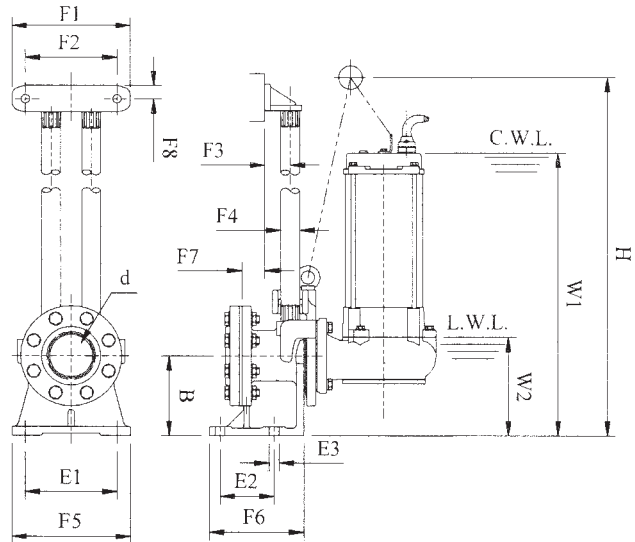


GUIDE RAIL DIMENSIONS

● SR50 (2")

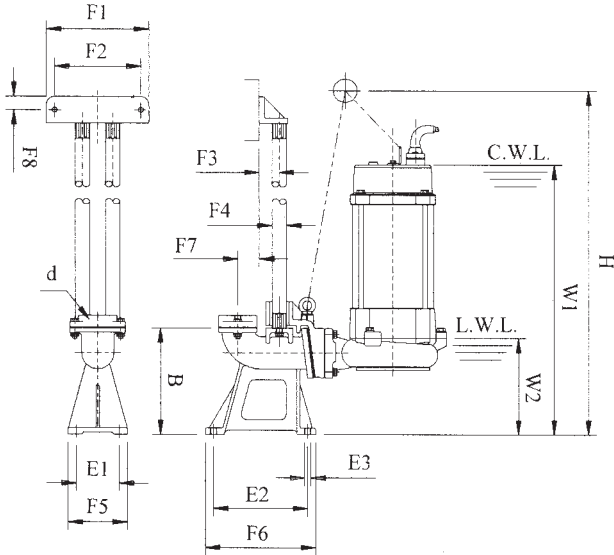

● SR80 (3")
SR100 (4")

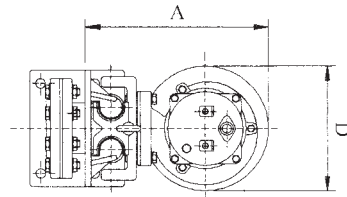

Pump Type	Discharge Bore	Foundation			Guide Rail Fitting Section												
		d	E1	E2	E3	A	B	D	H	F1	F2	F3	F4	F5	F6	F7	F8
JS250	SV	2" (50)	80	175	10	330	200	135	495	190	150	38	25A	110	205	36	25
JS400	SV	2" (50)	80	175	10	330	200	135	515	190	150	38	25A	110	205	36	25
JS650	SV	2" (50)	80	175	10	343	200	135	550	190	150	38	25A	110	205	36	25
JS750	SV	3" (80)	170	100	18	405	260	170	645	225	170	49	32A	225	180	43	20
JS1500	SV	3" (80)	170	100	18	315	150	195	715	225	170	49	32A	220	175	43	20
JST4	SV	2" (50)	80	175	10	330	200	135	495	190	150	38	25A	110	205	36	25
JST8	SV	3" (80)	170	100	18	405	260	170	585	225	170	49	32A	225	180	43	20
JST15	SV	3" (80)	170	100	18	315	150	195	630	225	170	49	32A	220	175	43	20
JST22	SV	3" (80)	170	100	18	355	150	255	685	240	170	49	32A	220	175	43	20
JST37	SV	3" (80)	170	100	18	355	150	255	760	240	170	49	32A	220	175	43	20
JST22	SV4	3" (80)	170	100	18	395	150	255	725	225	170	49	32A	220	175	43	20
JST37	SV4	3" (80)	170	100	18	395	150	255	740	225	170	49	32A	220	175	43	20
JST55	SV4	4" (100)	200	150	19	510	180	315	865	240	200	60	32A	250	225	43	18
JST75	SV4	4" (100)	200	150	19	510	180	315	925	240	200	60	32A	250	225	43	18

JS750	SK	2" (50)	80	175	10	340	200	195	660	190	150	38	25A	110	205	36	25
JS1500	SK	3" (80)	170	100	18	320	150	240	665	225	170	49	32A	220	175	43	20
JST8	SK	2" (50)	80	175	10	340	200	195	600	195	150	38	25A	110	205	36	25
JST15	SK	3" (80)	170	100	18	320	150	240	615	225	170	49	32A	220	175	43	20
JST22	SK	3" (80)	170	100	18	345	150	250	680	225	170	49	32A	220	175	43	20
JST37	SK	4" (100)	200	150	19	570	180	250	775	240	200	60	40A	250	225	73	18
JST55	SK	4" (100)	200	150	19	525	180	260	825	240	200	60	40A	250	225	73	18
JST75	SK	4" (100)	200	150	19	595	180	260	935	240	200	60	40A	250	225	73	18

GS1200		2" (50)	90	178	10	300	200	170	660	150	120	38	25A	115	210	36	15
GS1500		2" (50)	90	178	10	341	200	180	675	150	120	38	25A	115	210	36	15
GST12		2" (50)	90	178	10	336	200	170	615	150	120	38	25A	115	210	36	15
GST15		2" (50)	90	178	10	341	200	180	620	150	120	38	25A	115	210	36	15
GST22		2" (50)	90	178	10	366	200	206	680	150	120	38	25A	115	210	36	15
GST37		2" (50)	90	178	10	366	200	206	740	150	120	38	25A	115	210	36	15