


TDB22 SERIES



DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 40	10/16	156	110	84	4	19	22
	25/40	156	110	84	4	19	22
	63	178	125	84	4	23	28
DNA 65	10/16	191	145	118	4	19	24
	25(*)	191	145	118	8	19	24
	ON REQUEST						

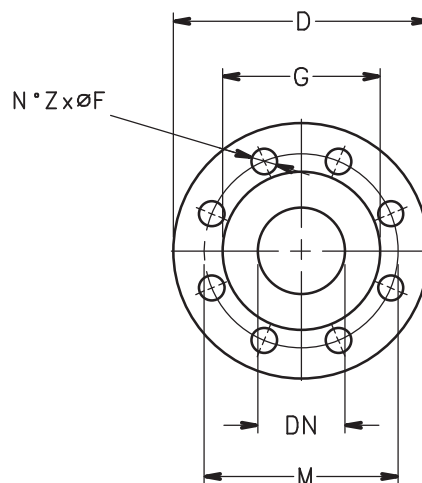

POSITION OF 3-STAGE FLANGES

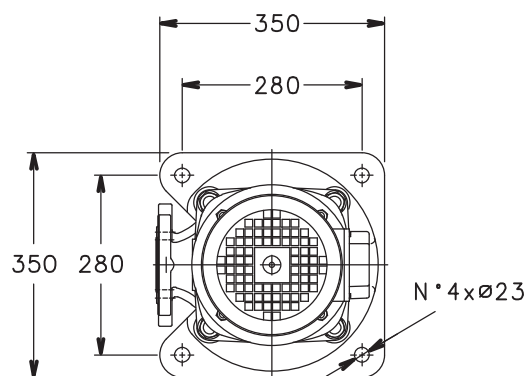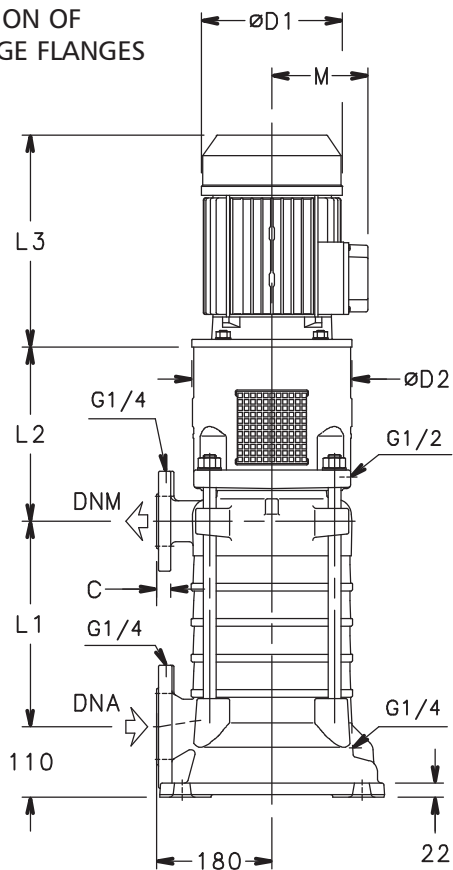

POSITION OF FLANGES UP TO 2 STAGES

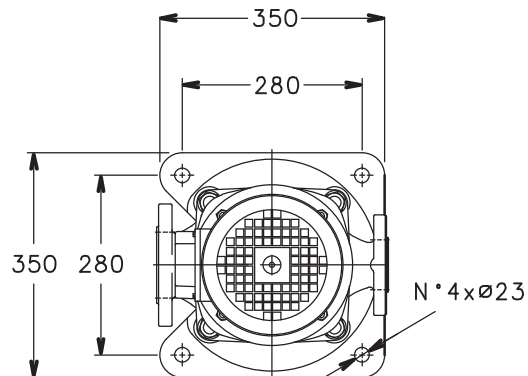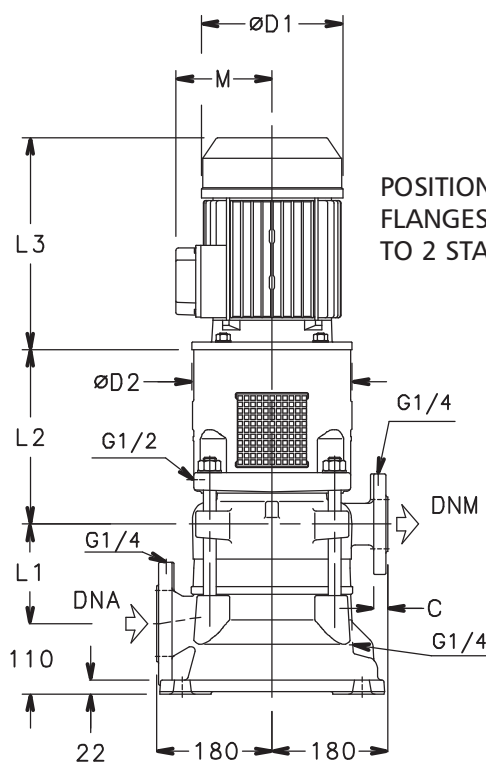

05400_A_DD



ITT

POMPODIRECT

TDB22 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC
TDB22 01/1C	2,2	90R	100	262	263	155	200	129	10	40	SA	91	104
TDB22 01/1B	3	100L	100	272	307	176	250	121	10	40	SA	91	109
TDB22 01/1A	4	112R	100	272	307	193	250	133	10	40	SA	91	113
TDB22 02/2C	4	112R	155	272	307	193	250	133	10	40	SA	101	123
TDB22 02/1B1C	5,5	132R	155	292	374	220	300	151	10	40	SA	104	139
TDB22 02/2B	7,5	132R	155	292	374	220	300	151	10	40	SA	104	145
TDB22 02/1A1B	7,5	132R	155	292	374	220	300	151	10	40	SA	104	145
TDB22 02/2A	11	160R	155	322	427	257	350	194	10	40	SA	111	178
TDB22 03/2B1C	7,5	132R	210	292	374	220	300	151	10	40	SA	114	155
TDB22 03/3B	11	160R	210	322	427	257	350	194	10	40	SA	122	189
TDB22 03/1A2B	11	160R	210	322	427	257	350	194	10	40	SA	122	189
TDB22 03/2A1B	15	160M	210	322	488	310	350	244	10	40	SA	122	219
TDB22 03/3A	15	160M	210	322	488	310	350	244	10	40	SA	122	219
TDB22 04/4B	15	160M	265	322	488	310	350	244	10	40	SA	132	229
TDB22 04/1A3B	15	160M	265	322	488	310	350	244	10	40	SA	132	229
TDB22 04/2A2B	15	160M	265	322	488	310	350	244	10	40	SA	132	229
TDB22 04/3A1B	15	160M	265	322	488	310	350	244	10	40	SA	132	229
TDB22 04/4A	18,5	160L	265	322	532	310	350	244	10	40	SA	132	247
TDB22 05/1A4B	15	160M	320	322	488	310	350	244	10	40	SB	143	240
TDB22 05/2A3B	18,5	160L	320	322	532	310	350	244	10	40	SB	143	258
TDB22 05/3A2B	18,5	160L	320	322	532	310	350	244	10	40	SB	143	258
TDB22 05/4A1B	22	180R	320	322	532	310	350	244	10	40	SB	143	263
TDB22 05/5A	22	180R	320	322	532	310	350	244	10	40	SB	143	263
TDB22 06/2A4B	22	180R	375	322	532	310	350	244	10	40	SB	153	273
TDB22 06/3A3B	22	180R	375	322	532	310	350	244	10	40	SB	153	273
TDB22 06/4A2B	22	180R	375	322	532	310	350	244	10	40	SB	153	273
TDB22 06/5A1B	30	200La	375	322	613	354	400	278	10	40	SB	155	287
TDB22 06/6A	30	200La	375	322	613	354	400	278	10	40	SB	155	287
TDB22 07/3A4B	30	200La	430	322	613	354	400	278	10	40	SB	166	298
TDB22 07/4A3B	30	200La	430	322	613	354	400	278	10	40	SB	166	298
TDB22 07/5A2B	30	200La	430	322	613	354	400	278	10	40	SB	166	298
TDB22 07/6A1B	30	200La	430	322	613	354	400	278	10	40	SB	166	298
TDB22 07/7A	30	200La	430	322	613	354	400	278	10	40	SB	166	298
TDB22 08/4A4B	30	200La	485	322	613	354	400	278	10	40	SB	176	308
TDB22 08/5A3B	30	200La	485	322	613	354	400	278	10	40	SB	176	308
TDB22 08/6A2B	30	200La	485	322	613	354	400	278	10	40	SB	176	308
TDB22 08/7A1B	37	200Lb	485	322	613	354	400	278	10	40	SB	176	318
TDB22 08/8A	37	200Lb	485	322	613	354	400	278	10	40	SB	176	318
TDB22 09/5A4B	30	200La	540	322	613	354	400	278	10	40	SB	187	319
TDB22 09/6A3B	37	200Lb	540	322	613	354	400	278	10	40	SB	187	329
TDB22 09/7A2B	37	200Lb	540	322	613	354	400	278	10	40	SB	187	329
TDB22 09/8A1B	37	200Lb	540	322	613	354	400	278	10	40	SB	187	329
TDB22 09/9A	37	200Lb	540	322	613	354	400	278	10	40	SB	187	329
TDB22/10/6A4B	37	200Lb	595	322	613	354	400	278	10	40/63	SB	197	339
TDB22 10/7A3B	37	200Lb	595	322	613	354	400	278	10	40/63	SB	197	339
TDB22 10/8A2B	37	200Lb	595	322	613	354	400	278	10	40/63	SB	197	339
TDB22 10/9A1B	45	225M	595	322	710	411	450	298	10	40/63	SB	202	420
TDB22 10/10A	45	225M	595	322	710	411	450	298	10	63	SB	202	420
TDB22 11/7A4B	45	225M	650	322	710	411	450	298	10	63	SB	212	430
TDB22 11/8A3B	45	225M	650	322	710	411	450	298	10	63	SB	212	430
TDB22 11/9A2B	45	225M	650	322	710	411	450	298	10	63	SB	212	430
TDB22 11/10A1B	45	225M	650	322	710	411	450	298	10	63	SB	212	430
TDB22 11/11A	45	225M	650	322	710	411	450	298	10	63	SB	212	430
TDB22 12/8A4B	45	225M	705	322	710	411	450	298	10	63	SB	223	441
TDB22 12/9A3B	45	225M	705	322	710	411	450	298	10	63	SB	223	441
TDB22 12/10A2B	45	225M	705	322	710	411	450	298	10	63	SB	223	441
TDB22 12/11A1B	55	250M	705	352	690	411	550	298	10	63	SB	258	483
TDB22 12/12A	55	250M	705	352	690	411	550	298	10	63	SB	258	483

Weights refer to Version F (Cast iron)

tdb22-2p50_a_td


Tel. 0294-457712 Fax 0294-457713

TDB35 SERIES



DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 40	10/16	156	110	84	4	19	22
	25/40	156	110	84	4	19	22
	63	178	125	84	4	23	28
DNA 65	10/16	191	145	118	4	19	24
	25(*)	191	145	118	8	19	24
	ON REQUEST						

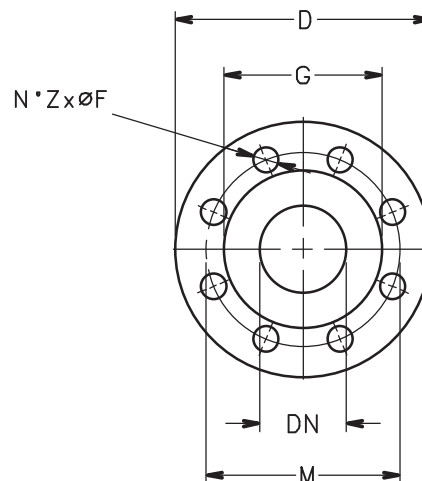

POSITION OF 3-STAGE FLANGES

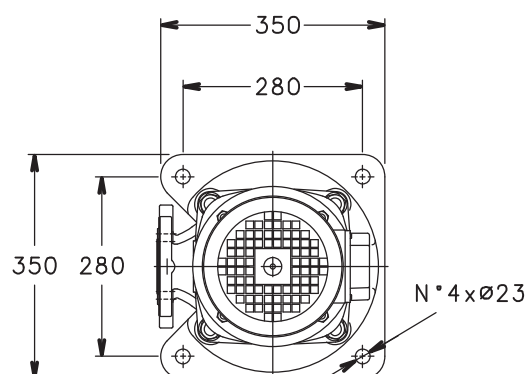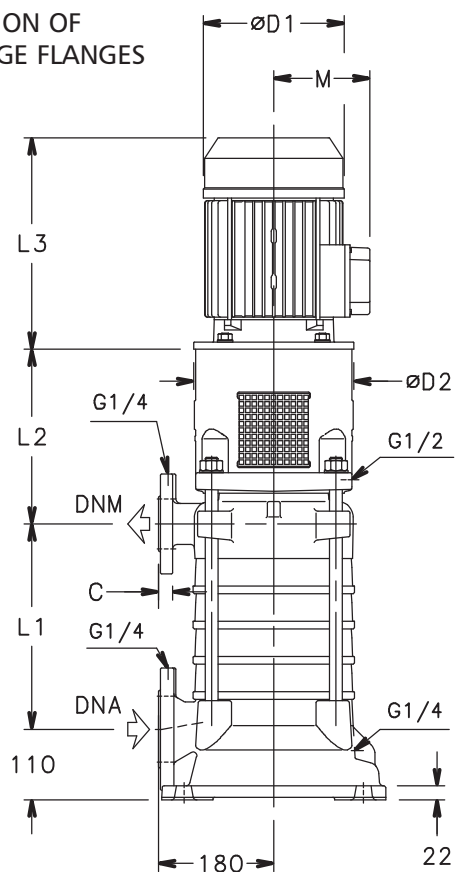

POSITION OF FLANGES UP TO 2 STAGES

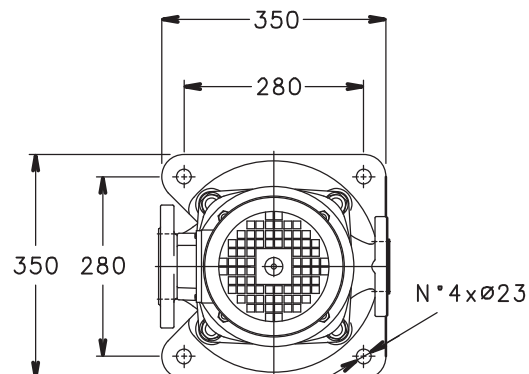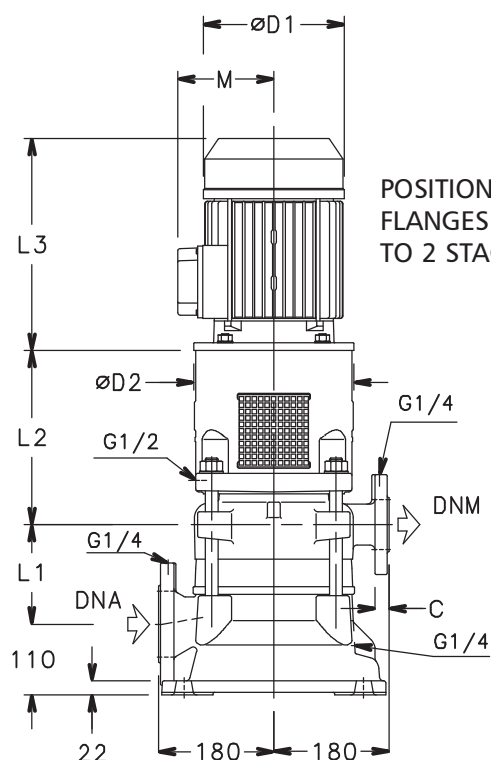

05400_A_DD

TDB35 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM		PUMP	ELECTRIC PUMP
TDB35 01/1C	3	100L	100	272	307	176	250	121	10	40	SA	91	109
TDB35 01/1B	4	112R	100	272	307	193	250	133	10	40	SA	91	113
TDB35 01/1A	5.5	132R	100	292	374	220	300	151	10	40	SA	93	128
TDB35 02/2B	7.5	132R	155	292	374	220	300	151	10	40	SA	104	145
TDB35 02/1A1B	11	160R	155	322	427	257	350	194	10	40	SA	111	178
TDB35 02/2A	11	160R	155	322	427	257	350	194	10	40	SA	111	178
TDB35 03/3B	11	160R	210	322	427	257	350	194	10	40	SA	122	189
TDB35 03/1A2B	15	160M	210	322	488	310	350	244	10	40	SA	122	219
TDB35 03/2A1B	15	160M	210	322	488	310	350	244	10	40	SA	122	219
TDB35 03/3A	18.5	160L	210	322	532	310	350	244	10	40	SA	122	237
TDB35 04/1A3B	18.5	160L	265	322	532	310	350	244	10	40	SA	132	247
TDB35 04/2A2B	18.5	160L	265	322	532	310	350	244	10	40	SA	132	247
TDB35 04/3A1B	22	180R	265	322	532	310	350	244	10	40	SA	132	252
TDB35 04/4A	22	180R	265	322	532	310	350	244	10	40	SA	132	252
TDB35 05/2A3B	22	180R	320	322	532	310	350	244	10	40	SB	143	263
TDB35 05/3A2B	30	200La	320	322	613	354	400	278	10	40	SB	145	277
TDB35 05/4A1B	30	200La	320	322	613	354	400	278	10	40	SB	145	277
TDB35 05/5A	30	200La	320	322	613	354	400	278	10	40	SB	145	277
TDB35 06/3A3B	30	200La	375	322	613	354	400	278	10	40	SB	155	287
TDB35 06/4A2B	30	200La	375	322	613	354	400	278	10	40	SB	155	287
TDB35 06/5A1B	30	200La	375	322	613	354	400	278	10	40	SB	155	287
TDB35 06/6A	37	200Lb	375	322	613	354	400	278	10	40	SB	155	297
TDB35 07/4A3B	37	200Lb	430	322	613	354	400	278	10	40	SB	166	308
TDB35 07/5A2B	37	200Lb	430	322	613	354	400	278	10	40	SB	166	308
TDB35 07/6A1B	37	200Lb	430	322	613	354	400	278	10	40	SB	166	308
TDB35 07/7A	37	200Lb	430	322	613	354	400	278	10	40	SB	166	308
TDB35 08/5A3B	37	200Lb	485	322	613	354	400	278	10	40	SB	176	308
TDB35 08/6A2B	37	200Lb	485	322	613	354	400	278	10	40	SB	176	308
TDB35 08/7A1B	45	225M	485	322	710	411	450	298	10	40	SB	181	399
TDB35 08/8A	45	225M	485	322	710	411	450	298	10	40	SB	181	399
TDB35 09/6A3B	45	225M	540	322	710	411	450	298	10	40	SB	191	409
TDB35 09/7A2B	45	225M	540	322	710	411	450	298	10	40	SB	191	409
TDB35 09/8A1B	45	225M	540	322	710	411	450	298	10	40	SB	191	409
TDB35 09/9A	55	250M	540	352	690	411	550	398	10	40	SB	226	451
TDB35 10/7A3B	55	250M	595	352	690	411	550	298	10	40/63	SB	237	462
TDB35 10/8A2B	55	250M	595	352	690	411	550	298	10	40/63	SB	237	462
TDB35 10/9A1B	55	250M	595	352	690	411	550	298	10	40/63	SB	237	462
TDB35 10/10A	55	250M	595	352	690	411	550	298	10	40/63	SB	237	462
TDB35 11/8A3B	55	250M	650	352	690	411	550	298	10	63	SB	247	472
TDB35 11/9A2B	55	250M	650	352	690	411	550	298	10	63	SB	247	472
TDB35 11/10A1B	55	250M	650	352	690	411	550	298	10	63	SB	247	472
TDB35 11/11A	75	280S	650	352	819	490	550	360	10	63	SB	247	582
TDB35 12/9A3B	55	250M	705	352	690	411	550	298	10	63	SB	258	483
TDB35 12/10A2B	75	280S	705	352	819	490	550	360	10	63	SB	258	593
TDB35 12/11A1B	75	280S	705	352	819	490	550	360	10	63	SB	258	593
TDB35 12/12A	75	280S	705	352	819	490	550	360	10	63	SB	258	593

Weights refer to Version F (Cast iron)

tdb35-2p50_b_td




ITT

POMPOIRECT



TDB58 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 65	10/16	191	145	118	4	19	24
	25/40	191	145	118	8	19	24
	63	205	160	118	8	23	28
DNA 100	10/16	235	180	156	8	19	27
	25 (*)	235	190	156	8	23	27
	ON REQUEST						

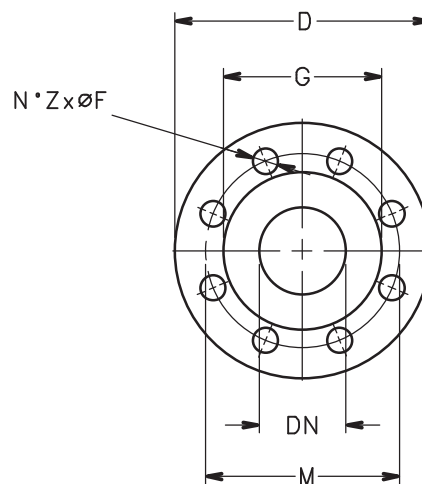

POSITION OF 3-STAGE FLANGES

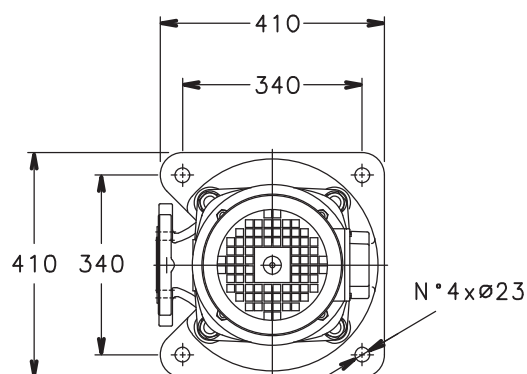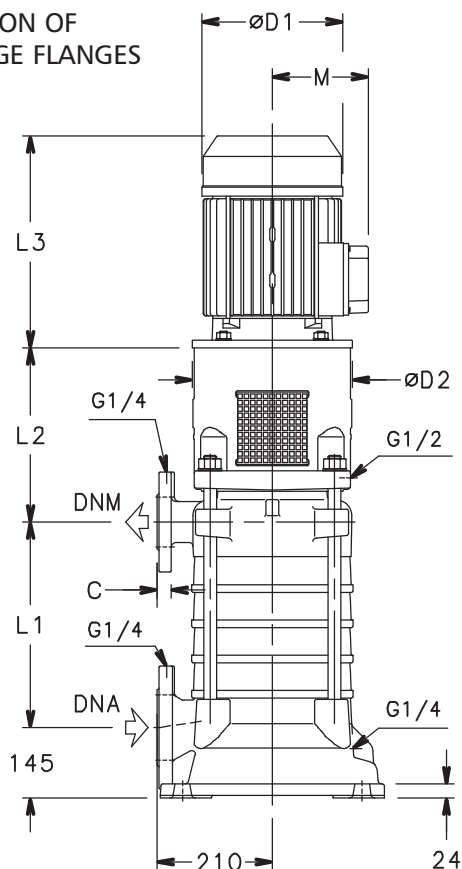

POSITION OF FLANGES UP TO 2 STAGES

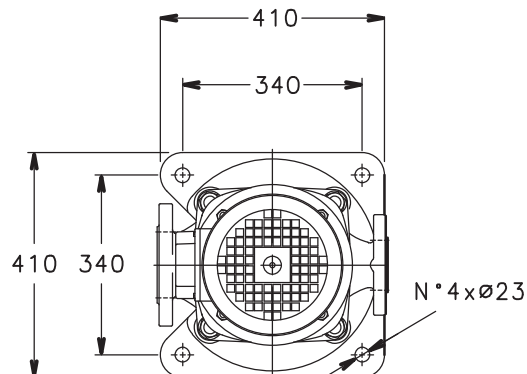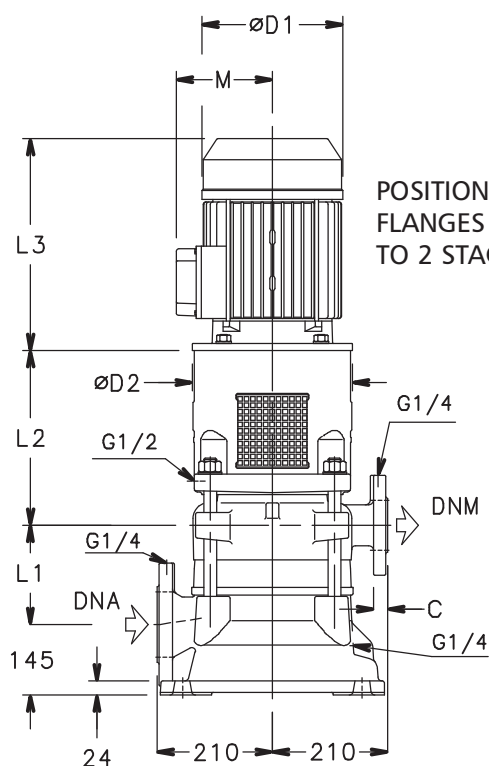

05401_A_DD

Tel. 0294-457712 Fax 0294-457713

TDB58 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL TIPE	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM		PUMP	ELECTRIC PUMP
TDB58 01/1C	7,5	132R	125	311	374	220	300	151	10	16	SA	133	174
TDB58 01/1B	7,5	132R	125	311	374	220	300	151	10	16	SA	133	174
TDB58 01/1A	11	160R	125	341	427	257	350	194	10	16	SA	143	210
TDB58 02/2C	15	160M	195	341	488	310	350	244	10	16	SA	160	257
TDB58 02/1B1C	15	160M	195	341	488	310	350	244	10	16	SA	160	257
TDB58 02/2B	18,5	160L	195	341	532	310	350	244	10	16	SA	160	275
TDB58 02/1A1B	18,5	160L	195	341	532	310	350	244	10	16	SA	160	275
TDB58 02/2A	22	180R	195	341	532	310	350	244	10	16	SA	160	280
TDB58 03/2B1C	22	180R	265	341	532	310	350	244	10	16	SA	176	296
TDB58 03/3B	30	200La	265	341	613	354	400	278	10	16/40	SA/SB	179	311
TDB58 03/1A2B	30	200La	265	341	613	354	400	278	10	16/40	SA/SB	179	311
TDB58 03/2A1B	30	200La	265	341	613	354	400	278	10	16/40	SA/SB	179	311
TDB58 03/3A	37	200Lb	265	341	613	354	400	278	10	16/40	SA/SB	179	321
TDB58 04/4B	30	200La	335	341	613	354	400	278	10	40	SB	196	328
TDB58 04/1A3B	37	200Lb	335	341	613	354	400	278	10	40	SB	196	338
TDB58 04/2A2B	37	200Lb	335	341	613	354	400	278	10	40	SB	196	338
TDB58 04/3A1B	45	225M	335	341	710	411	450	298	10	40	SB	201	419
TDB58 04/4A	45	225M	335	341	710	411	450	298	10	40	SB	201	419
TDB58 05/1A4B	45	225M	405	341	710	411	450	298	10	40	SB	217	435
TDB58 05/2A3B	45	225M	405	341	710	411	450	298	10	40	SB	217	435
TDB58 05/3A2B	55	250M	405	371	690	411	550	298	10	40	SB	227	452
TDB58 05/4A1B	55	250M	405	371	690	411	550	298	10	40	SB	227	452
TDB58 05/5A	55	250M	405	371	690	411	550	298	10	40	SB	227	452
TDB58 06/2A4B	55	250M	475	371	690	411	550	298	10	40	SB	244	469
TDB58 06/3A3B	55	250M	475	371	690	411	550	298	10	40	SB	244	469
TDB58 06/4A2B	75	280S	475	371	819	490	550	360	10	40	SB	244	579
TDB58 06/5A1B	75	280S	475	371	819	490	550	360	10	40	SB	244	579
TDB58 06/6A	75	280S	475	371	819	490	550	360	10	40	SB	244	579
TDB58 07/3A4B	75	280S	545	371	819	490	550	360	10	40	SB	260	595
TDB58 07/4A3B	75	280S	545	371	819	490	550	360	10	40/63	SB	260	595
TDB58 07/5A2B	75	280S	545	371	819	490	550	360	10	40/63	SB	260	595
TDB58 07/6A1B	75	280S	545	371	819	490	550	360	10	40/63	SB	260	595
TDB58 07/7A	75	280S	545	371	819	490	550	360	10	40/63	SB	260	595
TDB58 08/4A4B	75	280S	615	371	819	490	550	360	10	40/63	SB	277	612
TDB58 08/5A3B	90	280M	615	371	819	490	550	360	10	40/63	SB	277	655
TDB58 08/6A2B	90	280M	615	371	819	490	550	360	10	63	SB	277	655
TDB58 08/7A1B	90	280M	615	371	819	490	550	360	10	63	SB	277	655
TDB58 08/8A	90	280M	615	371	819	490	550	360	10	63	SB	277	655
TDB58 09/5A4B	90	280M	685	371	819	490	550	360	10	63	SB	293	655
TDB58 09/6A3B	90	280M	685	371	819	490	550	360	10	63	SB	293	655
TDB58 09/7A2B	90	280M	685	371	819	490	550	360	10	63	SB	293	655


Weights refer to Version F (Cast iron)

tdb58-2p50_a_id



TDB78 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 65	10/16	191	145	118	4	19	24
	25/40	191	145	118	8	19	24
	63	205	160	118	8	23	28
DNA 100	10/16	235	180	156	8	19	27
	25 (*)	235	190	156	8	23	27
	ON REQUEST						

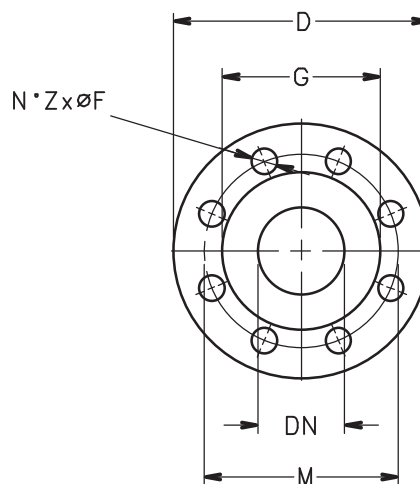

POSITION OF 3-STAGE FLANGES

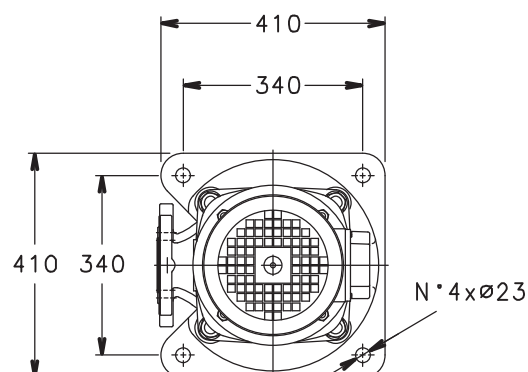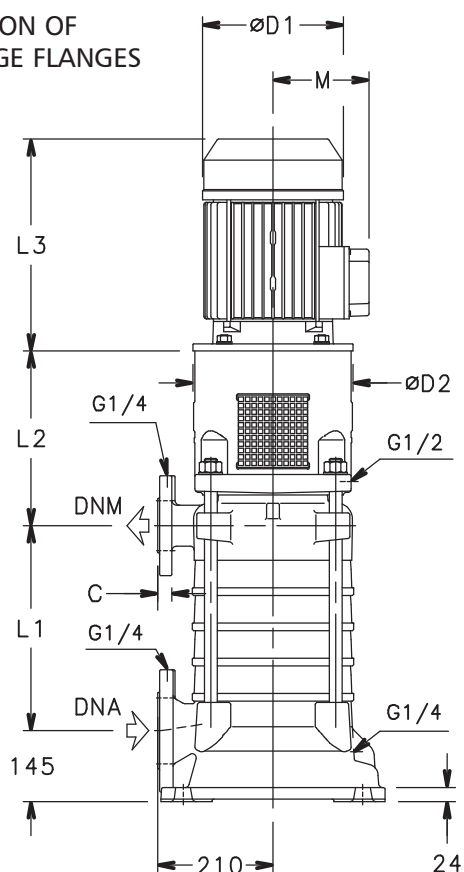

POSITION OF FLANGES UP TO 2 STAGES

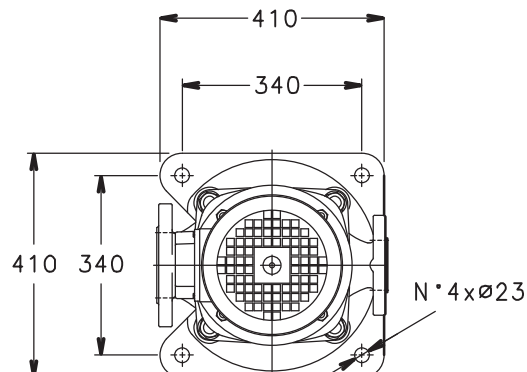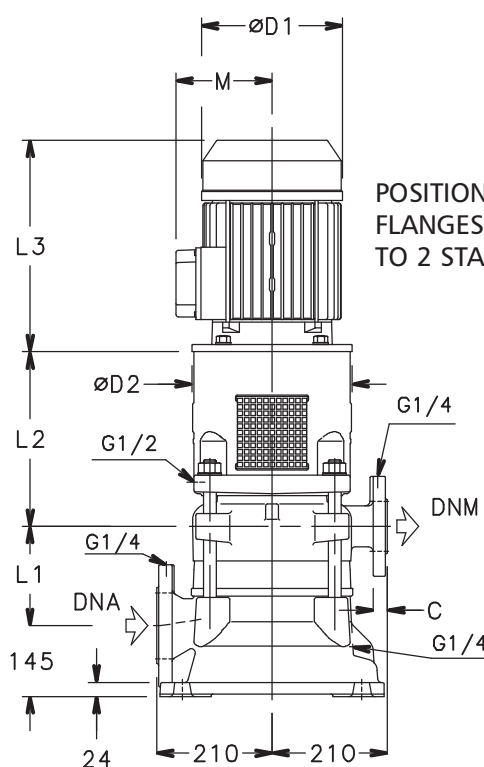

05401_A_DD

TDB78 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB78 01/1C	7,5	132R	125	311	374	220	300	151	10	16	SA	133	174
TDB78 01/1B	11	160R	125	341	427	257	350	194	10	16	SA	143	210
TDB78 01/1A	15	160M	125	341	488	310	350	244	10	16	SA	143	240
TDB78 02/1B1C	18,5	160L	195	341	532	310	350	244	10	16	SA	160	275
TDB78 02/2B	22	180R	195	341	532	310	350	244	10	16	SA	160	280
TDB78 02/1A1B	30	200La	195	341	613	354	400	278	10	16	SA	163	295
TDB78 02/2A	37	200Lb	195	341	613	354	400	278	10	16	SA	163	305
TDB78 03/3B	37	200Lb	265	341	613	354	400	278	10	16/40	SA/SB	179	321
TDB78 03/1A2B	37	200Lb	265	341	613	354	400	278	10	16/40	SA/SB	179	321
TDB78 03/2A1B	45	225M	265	341	710	411	450	298	10	16/40	SA/SB	184	402
TDB78 03/3A	55	250M	265	371	690	411	550	298	10	40	SB	194	419
TDB78 04/1A3B	55	250M	335	371	690	411	550	298	10	40	SB	211	436
TDB78 04/2A2B	55	250M	335	371	690	411	550	298	10	40	SB	211	436
TDB78 04/3A1B	75	280S	335	371	819	490	550	360	10	40	SB	211	546
TDB78 04/4A	75	280S	335	371	819	490	550	360	10	40	SB	211	546
TDB78 05/2A3B	75	280S	405	371	819	490	550	360	10	40	SB	227	562
TDB78 05/3A2B	75	280S	405	371	819	490	550	360	10	40	SB	227	562
TDB78 05/4A1B	75	280S	405	371	819	490	550	360	10	40	SB	227	562
TDB78 05/5A	90	280M	405	371	819	490	550	360	10	40	SB	227	605
TDB78 06/3A3B	90	280M	475	371	819	490	550	360	10	40	SB	244	622
TDB78 06/4A2B	90	280M	475	371	819	490	550	360	10	40	SB	244	622
TDB78 06/5A1B	90	280M	475	371	819	490	550	360	10	40	SB	244	622


Weights refer to Version F (Cast iron)

tdb78-2p50_a_td



TDB-TDV120 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 100	10/16	235	180	156	8	19	27
	25/40	235	180	156	8	23	27
	63	273	200	156	8	28	32
DNA 125	10/16	279	210	184	8	19	29
	25(*)	279	220	184	8	28	29
	ON REQUEST						

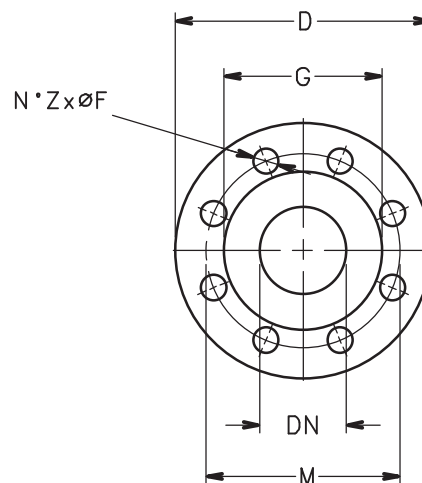

POSITION OF 3-STAGE FLANGES

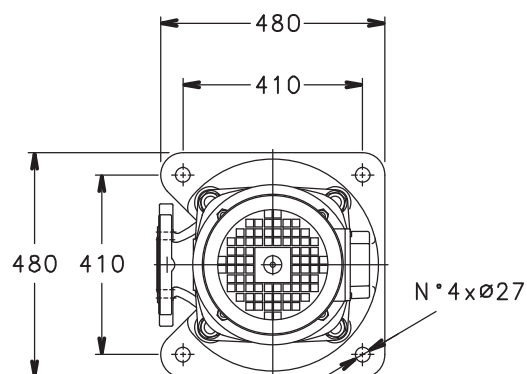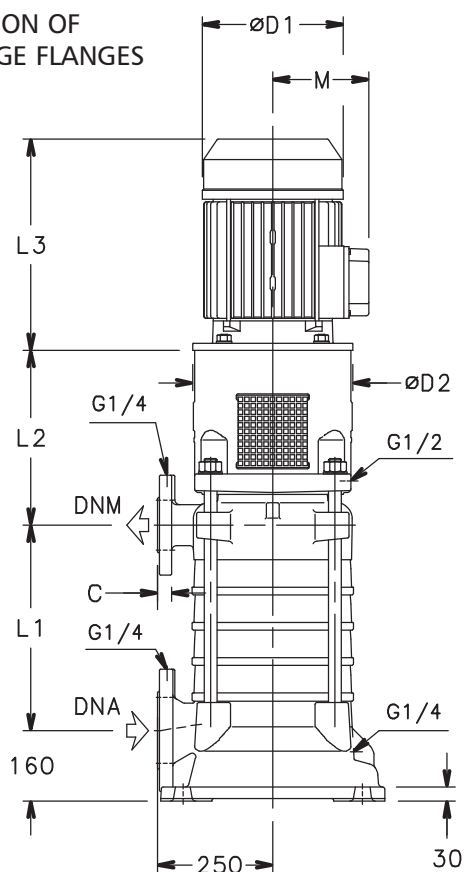

POSITION OF FLANGES UP TO 2 STAGES

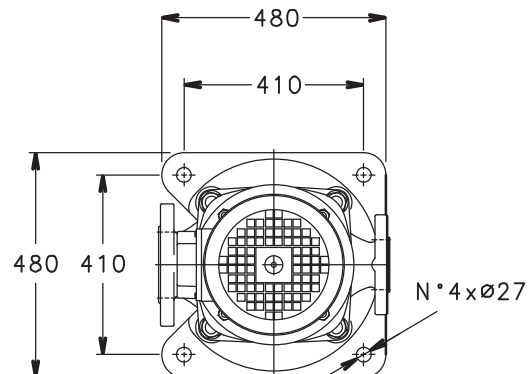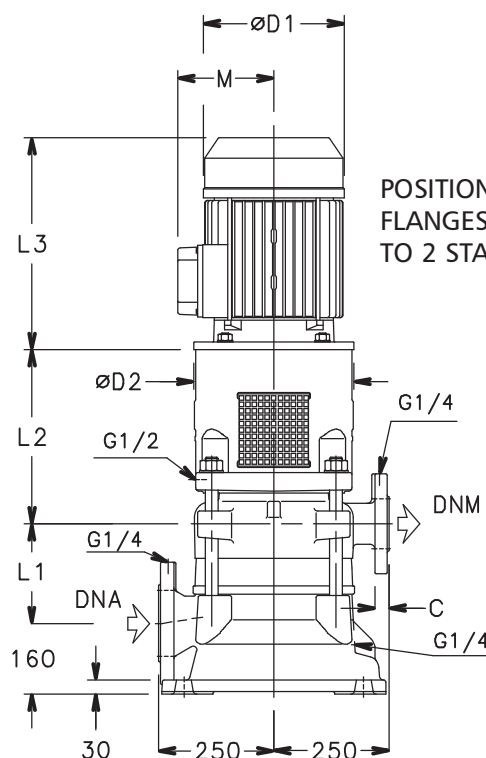

05402_A_DD

TDB-TDV120 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES


PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB120 01/1C	22	180R	175	371	532	310	350	244	10	16	SA	270	390
TDB120 01/1B	30	200La	175	371	613	354	400	278	10	16	SA	271	403
TDB120 01/1A	37	200Lb	175	371	613	354	400	278	10	16	SA	271	413
TDB120 02/2C	45	225M	260	371	710	411	450	298	10	16	SA	304	522
TDB120 02/1B1C	55	250M	260	401	690	411	550	298	10	16/40	SA/SB	311	536
TDB120 02/2B	55	250M	260	401	690	411	550	298	10	16/40	SA/SB	311	536
TDB120 02/1A1B	75	280S	260	401	819	490	550	360	10	16/40	SA/SB	311	646
TDB120 02/2A	75	280S	260	401	819	490	550	360	10	40	SA/SB	311	646
TDB120 03/1B2C	75	280S	345	401	819	490	550	360	10	40	SB	343	678
TDB120 03/2B1C	75	280S	345	401	819	490	550	360	10	40	SB	343	678
TDB120 03/3B	90	280M	345	401	819	490	550	360	10	40	SB	343	721
TDB120 03/1A2B	90	280M	345	401	819	490	550	360	10	40	SB	343	721
TDV120 03/2A1B	110	315S	345	514	962	604	660	450	10	40	SB	394	1107
TDV120 03/3A	110	315S	345	514	962	604	660	450	10	40	SB	394	1107
TDV120 04/4B	110	315S	430	514	962	604	660	450	10	40	SB	426	1139
TDV120 04/1A3B	132	315Ma	430	514	962	604	660	450	10	40	SB	426	1139
TDV120 04/2A2B	132	315Ma	430	514	962	604	660	450	10	40	SB	426	1139
TDV120 04/3A1B	160	315Mc	430	514	962	604	660	450	10	40	SB	431	1211
TDV120 04/4A	160	315Mc	430	514	962	604	660	450	10	40	SB	431	1211
TDV120 05/1A4B	160	315Mc	515	514	962	604	660	450	10	40/63	SB	463	1243
TDV120 05/2A3B	160	315Mc	515	514	962	604	660	450	10	40/63	SB	463	1243
TDV120 05/3A2B	160	315Mc	515	514	962	604	660	450	10	40/63	SB	463	1243
TDV120 05/4A1B	200	315Md	515	514	962	604	660	485	10	63	SB	463	1303
TDV120 05/5A	200	315Md	515	514	962	604	660	485	10	63	SB	463	1303
TDV120 06/2A4B	200	315Md	600	514	962	604	660	485	10	63	SB	495	1335
TDV120 06/3A3B	200	315Md	600	514	962	604	660	485	10	63	SB	495	1335
TDV120 06/4A2B	200	315Md	600	514	962	604	660	485	10	63	SB	495	1335
TDV120 06/5A1B	200	315Md	600	514	962	604	660	485	10	63	SB	495	1335
TDV120 06/6A	200	315Md	600	514	962	604	660	485	10	63	SB	495	1335

Weights refer to Version F (Cast iron)



tdb-tdv120-2p50_c_td

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 100	10/16	235	180	156	8	19	27
	25/40	235	180	156	8	23	27
	63	273	200	156	8	28	32
DNA 125	10/16	279	210	184	8	19	29
	25 (*)	279	220	184	8	28	29
	ON REQUEST						

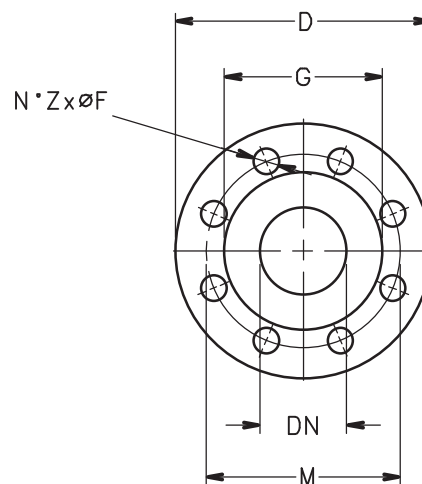

POSITION OF 3-STAGE FLANGES

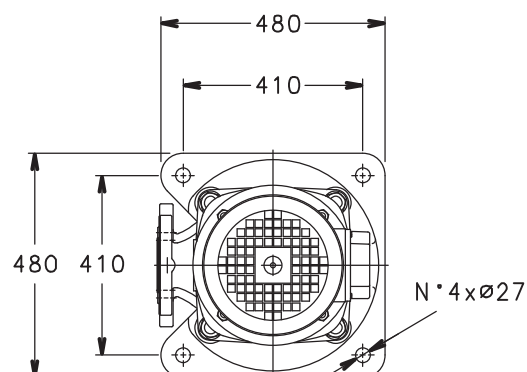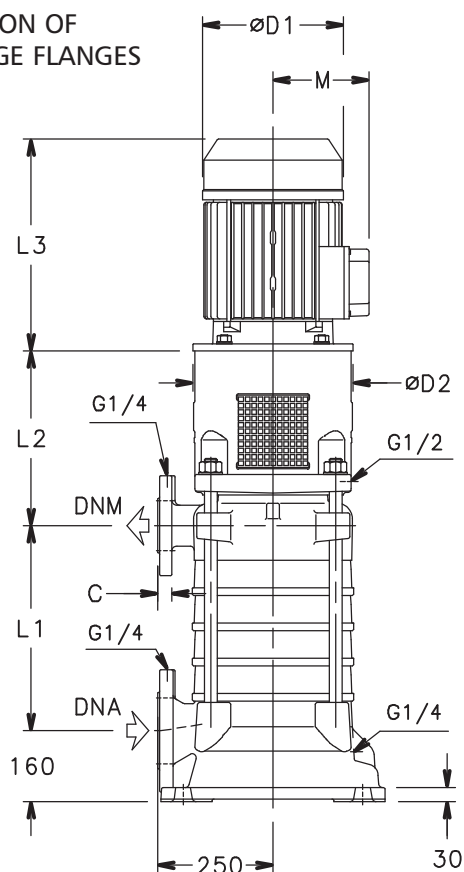

POSITION OF FLANGES UP TO 2 STAGES

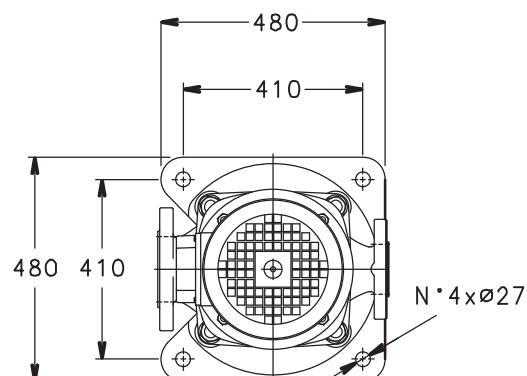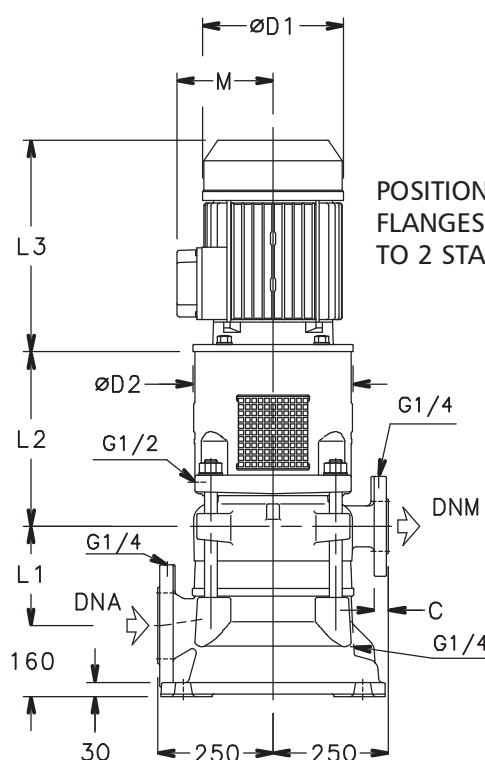

05402_A_DD

TDB-TDV170 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM		PUMP	ELECTRIC PUMP
TDB170 01/1C	30	200La	175	371	613	354	400	278	10	16	SA	271	403
TDB170 01/1B	37	200Lb	175	371	613	354	400	278	10	16	SA	271	413
TDB170 01/1A	45	225M	175	371	710	411	450	298	10	16	SA	272	490
TDB170 01/1A	55	250M	175	401	690	411	550	298	10	16	SA	279	504
TDB170 02/2C	55	250M	260	401	690	411	550	298	10	16/40	SA/SB	311	536
TDB170 02/1B1C	55	250M	260	401	690	411	550	298	10	16/40	SA/SB	311	536
TDB170 02/2B	75	280S	260	401	819	490	550	360	10	16/40	SA/SB	311	646
TDB170 02/1A1B	90	280M	260	401	819	490	550	360	10	16/40	SA/SB	311	689
TDV170 02/2A	110	315S	260	514	962	604	660	450	10	40	SA/SB	362	1075
TDV170 03/2B1C	110	315S	345	514	962	604	660	450	10	40	SB	394	1107
TDV170 03/3B	110	315S	345	514	962	604	660	450	10	40	SB	394	1107
TDV170 03/1A2B	110	315S	345	514	962	604	660	450	10	40	SB	394	1107
TDV170 03/2A1B	132	315Ma	345	514	962	604	660	450	10	40	SB	394	1107
TDV170 03/3A	160	315Mc	345	514	962	604	660	450	10	40	SB	399	1179
TDV170 04/1A3B	160	315Mc	430	514	962	604	660	450	10	40	SB	431	1211
TDV170 04/2A2B	160	315Mc	430	514	962	604	660	450	10	40	SB	431	1211
TDV170 04/3A1B	200	315Md	430	514	962	604	660	485	10	40	SB	431	1271
TDV170 04/4A	200	315Md	430	514	962	604	660	485	10	40/63	SB	431	1271
TDV170 05/2A3B	200	315Md	515	514	962	604	660	485	10	40/63	SB	463	1303
TDV170 05/3A2B	200	315Md	515	514	962	604	660	485	10	40/63	SB	463	1303


Weights refer to Version F (Cast iron)

tdb-tdv170-2p50_b_td



TDV220 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 125	10/16	279	210	184	8	19	29
	25/40	279	220	184	8	28	29
	63	330	240	184	8	31	35
DNA 150	10/16	300	240	211	8	23	32
	25 (*)	300	250	211	8	28	32
	ON REQUEST						

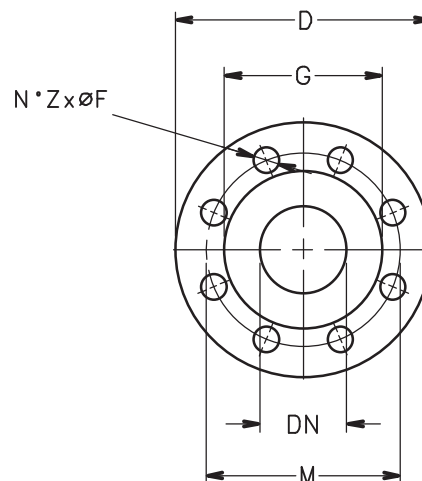

POSITION OF 3-STAGE FLANGES

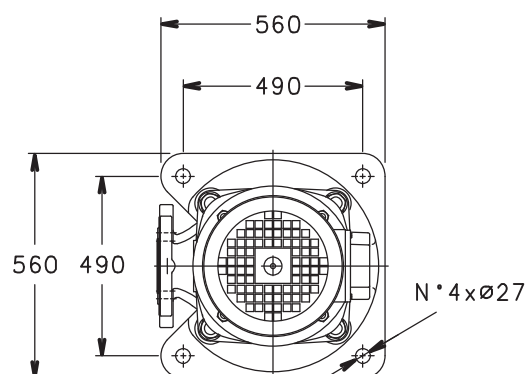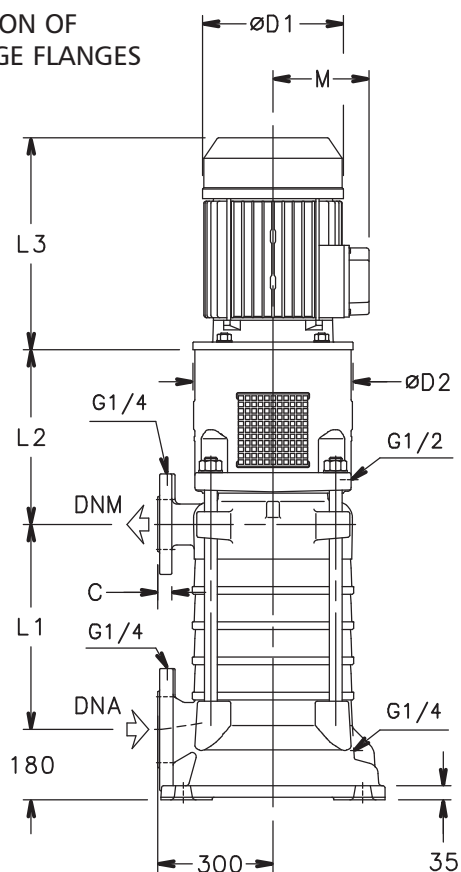

POSITION OF FLANGES UP TO 2 STAGES

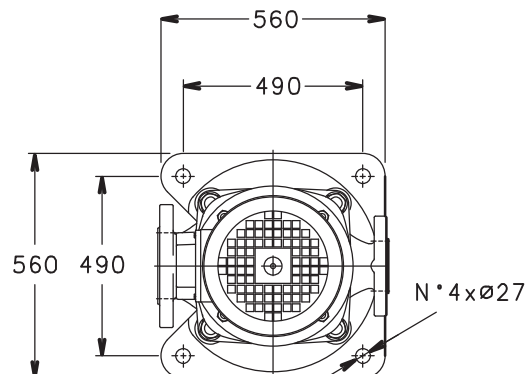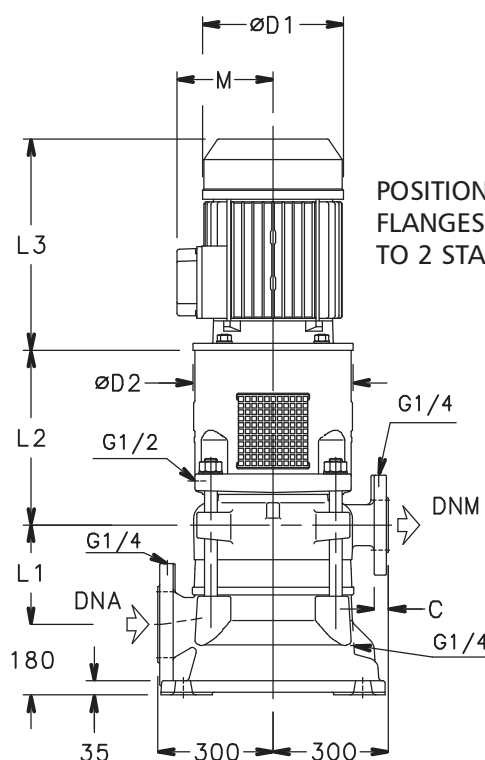

05405_A_DD

TDV220 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM		PUMP	ELECTRIC PUMP
TDV220 01/1D	45	225M	220	597	710	411	450	298	10	16	SA	471	689
TDV220 01/1C	55	250M	220	597	690	411	550	298	10	16	SA	479	704
TDV220 01/1B	75	280S	220	597	819	490	550	360	10	16	SA	481	816
TDV220 01/1A	90	280M	220	597	819	490	550	360	10	16/40	SA	481	859
TDV220 02/1C1D	90	280M	325	597	819	490	550	360	10	16/40	SA/SB	534	912
TDV220 02/2C	90	280M	325	597	819	490	550	360	10	16/40	SA/SB	534	912
TDV220 02/1B1C	110	315S	325	597	962	604	660	450	10	40	SA/SB	544	1257
TDV220 02/2B	132	315Ma	325	597	962	604	660	450	10	40	SA/SB	544	1257
TDV220 02/1A1B	160	315Mc	325	597	962	604	660	450	10	40	SB	549	1329
TDV220 02/2A	160	315Mc	325	597	962	604	660	450	10	40	SB	549	1329
TDV220 03/1B2C	160	315Mc	430	597	962	604	660	450	10	40	SB	602	1382
TDV220 03/2B1C	160	315Mc	430	597	962	604	660	450	10	40	SB	602	1382
TDV220 03/3B	200	315Md	430	597	962	604	660	485	10	40	SB	602	1442
TDV220 03/1A2B	200	315Md	430	597	962	604	660	485	10	40	SB	602	1442
TDV220 03/2A1B	250	355La	430	597	1335	770	800	607	10	40/63	SB	651	2271
TDV220 03/3A	250	355La	430	597	1335	770	800	607	10	40/63	SB	651	2271
TDV220 04/4B	250	355La	535	597	1335	770	800	607	10	40/63	SB	704	2324
TDV220 04/1A3B	250	355La	535	597	1335	770	800	607	10	63	SB	704	2324
TDV220 04/2A2B	315	355Lb	535	597	1335	770	800	607	10	63	SB	704	2514
TDV220 04/3A1B	315	355Lb	535	597	1335	770	800	607	10	63	SB	704	2514
TDV220 04/4A	315	355Lb	535	597	1335	770	800	607	10	63	SB	704	2514
TDV220 05/1A4B	355	355Lc	640	597	1335	770	800	607	10	63	SB	762	2792
TDV220 05/2A3B	355	355Lc	640	597	1335	770	800	607	10	63	SB	762	2792
TDV220 05/3A2B	355	355Lc	640	597	1335	770	800	607	10	63	SB	762	2792

Weights refer to Version F (Cast iron)


tdv220-2p50_b_td

TDV280 SERIES



DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 125	10/16	279	210	184	8	19	29
	25/40	279	220	184	8	28	29
	63	330	240	184	8	31	35
DNA 150	10/16	300	240	211	8	23	32
	25(*)	300	250	211	8	28	32
	ON REQUEST						

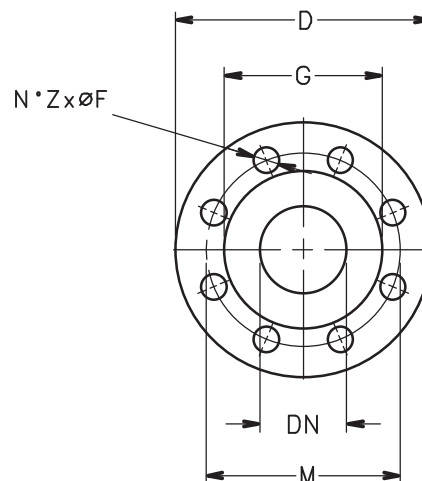

POSITION OF 3-STAGE FLANGES

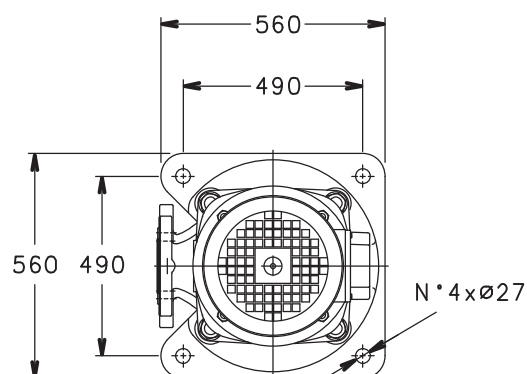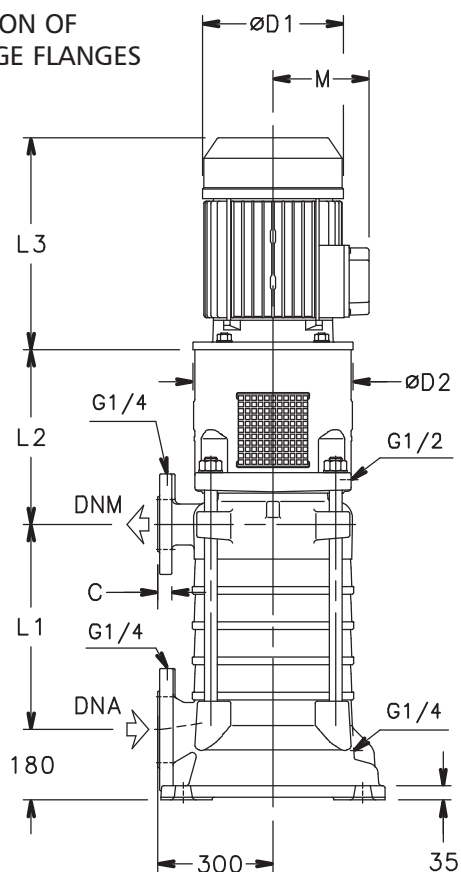

POSITION OF FLANGES UP TO 2 STAGES

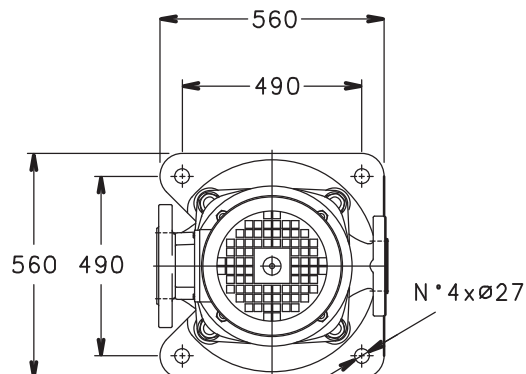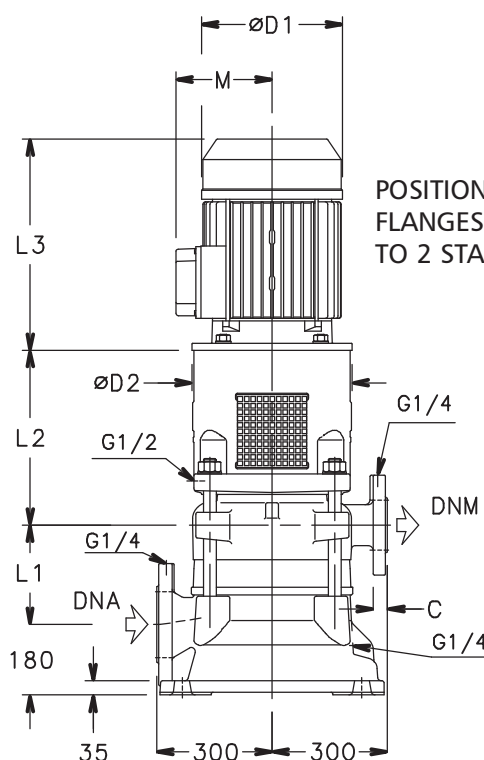

05405_A_DD

TDV280 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDV280 01/1D	45	225M	220	597	710	411	450	298	10	16	SA	471	689
TDV280 01/1C	55	250M	220	597	690	411	550	298	10	16	SA	479	704
TDV280 01/1B	75	280S	220	597	819	490	550	360	10	16	SA	481	816
TDV280 01/1A	90	280M	220	597	819	490	550	360	10	16/40	SA	481	859
TDV280 02/1C1D	90	280M	325	597	819	490	550	360	10	16/40	SA/SB	534	912
TDV280 02/2C	110	315S	325	597	962	604	660	450	10	16/40	SA/SB	544	1257
TDV280 02/1B1C	110	315S	325	597	962	604	660	450	10	40	SA/SB	544	1257
TDV280 02/2B	132	315Ma	325	597	962	604	660	450	10	40	SA/SB	544	1257
TDV280 02/1A1B	160	315Mc	325	597	962	604	660	450	10	40	SB	549	1329
TDV280 02/2A	200	315Md	325	597	962	604	660	485	10	40	SB	549	1389
TDV280 03/2B1C	200	315Md	430	597	962	604	660	485	10	40	SB	602	1442
TDV280 03/3B	200	315Md	430	597	962	604	660	485	10	40	SB	602	1442
TDV280 03/1A2B	250	355La	430	597	1335	770	800	607	10	40	SB	651	2271
TDV280 03/2A1B	250	355La	430	597	1335	770	800	607	10	40	SB	651	2271
TDV280 03/3A	315	355Lb	430	597	1335	770	800	607	10	40/63	SB	651	2461
TDV280 04/4B	315	355Lb	535	597	1335	770	800	607	10	40/63	SB	704	2514
TDV280 04/1A3B	315	355Lb	535	597	1335	770	800	607	10	40/63	SB	704	2514
TDV280 04/2A2B	315	355Lb	535	597	1335	770	800	607	10	63	SB	704	2514
TDV280 04/3A1B	355	355Lc	535	597	1535	770	800	607	10	63	SB	709	2739
TDV280 04/4A	355	355Lc	535	597	1535	770	800	607	10	63	SB	709	2739
TDV280 05/1A4B	355	355Lc	640	597	1535	770	800	607	10	63	SB	762	2792
TDV280 05/2A3B	355	355Lc	640	597	1535	770	800	607	10	63	SB	762	2792


Weights refer to version F (Cast iron)

tdv280-2p50_a_td



TDB22..4 - TDB35..4 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 40	10/16	156	110	84	4	19	22
	25/40	156	110	84	4	19	22
	63	178	125	84	4	23	28
DNA 65	10/16	191	145	118	4	19	24
	25 (*)	191	145	118	8	19	24
	ON REQUEST						

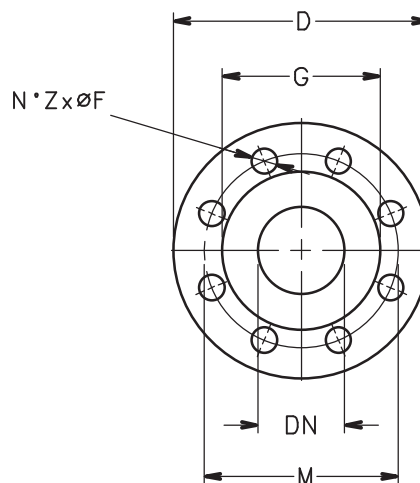

POSITION OF 3-STAGE FLANGES

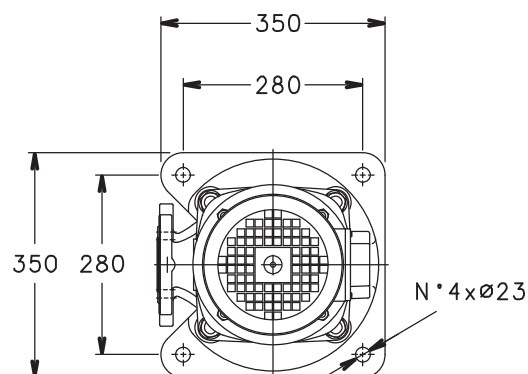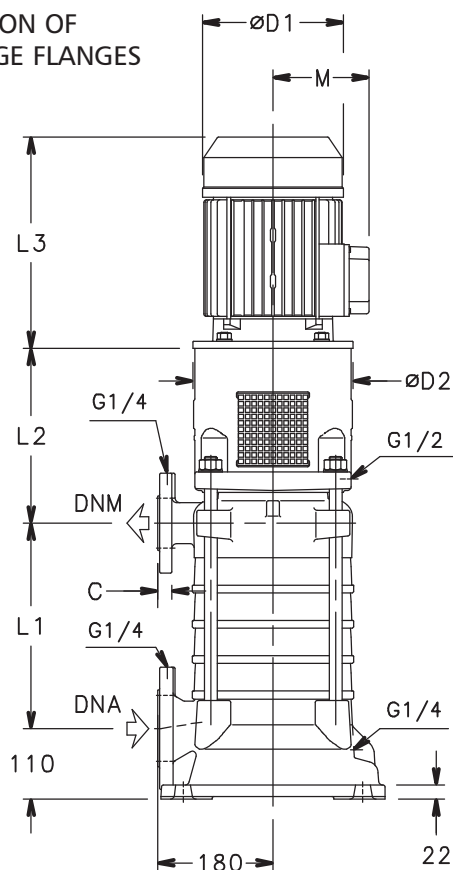

POSITION OF FLANGES UP TO 2 STAGES

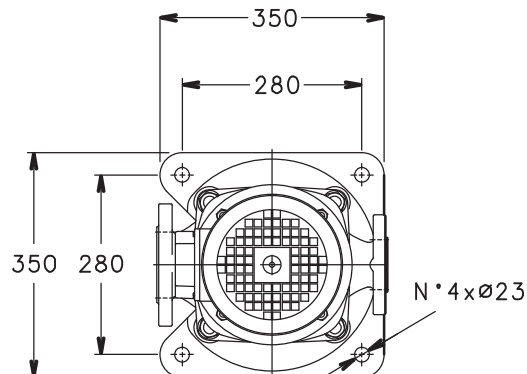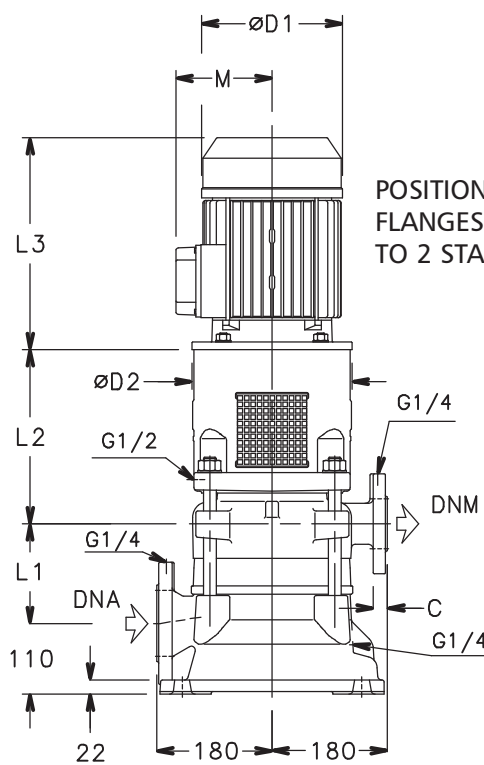

05400_A_DD

TDB22..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB22 01/1A..4	1,1	90La	100	262	281	176	200	121	10	40	SA	91	103
TDB22 02/2A..4	1,1	90La	155	262	281	176	200	121	10	40	SA	101	113
TDB22 03/3A..4	1,5	90Lb	210	262	281	176	200	121	10	40	SA	112	126
TDB22 04/4A..4	2,2	100La	265	272	307	193	250	133	10	40	SA	122	142
TDB22 05/5A..4	3	100Lb	320	272	307	193	250	133	10	40	SA	133	156
TDB22 06/6A..4	3	100Lb	375	272	307	193	250	133	10	40	SA	143	166
TDB22 07/7A..4	4	112M	430	272	330	220	250	151	10	40	SA	154	186
TDB22 08/8A..4	5,5	132S	485	292	366	257	300	194	10	40	SA	167	211
TDB22 09/9A..4	5,5	132S	540	292	366	257	300	194	10	40	SA	177	221
TDB22 10/10A..4	5,5	132S	595	292	366	257	300	194	10	40	SA	188	232
TDB22 11/11A..4	7,5	132M	650	292	404	257	300	194	10	40	SA	198	255
TDB22 12/12A..4	7,5	132M	705	292	404	257	300	194	10	40	SA	209	266
TDB22 13/13A..4	7,5	132M	760	292	404	257	300	194	10	40	SA	219	276
TDB22 14/14A..4	7,5	132M	815	292	404	257	300	194	10	40	SA	230	287
TDB22 15/15A..4	11	160M	870	322	538	314	350	258	10	40	SA	248	322
TDB22 16/16A..4	11	160M	925	322	538	314	350	258	10	40	SA	258	332
TDB22 17/17A..4	11	160M	980	322	538	314	350	258	10	40	SB	269	343
TDB22 18/18A..4	11	160M	1035	322	538	314	350	258	10	40	SB	279	353

Weights refer to Version F (Cast iron)

tdb22-4p50_a_td

TDB35..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB35 01/1A..4	1,1	90La	100	262	281	176	200	121	10	40	SA	91	103
TDB35 02/2A..4	1,5	90Lb	155	262	281	176	200	121	10	40	SA	101	115
TDB35 03/3A..4	2,2	100La	210	272	307	193	250	133	10	40	SA	112	132
TDB35 04/4A..4	3	100Lb	265	272	307	193	250	133	10	40	SA	122	145
TDB35 05/5A..4	4	112M	320	272	330	220	250	151	10	40	SA	133	165
TDB35 06/6A..4	4	112M	375	272	330	220	250	151	10	40	SA	143	175
TDB35 07/7A..4	5,5	132S	430	292	366	257	300	194	10	40	SA	156	200
TDB35 08/8A..4	5,5	132S	485	292	366	257	300	194	10	40	SA	167	211
TDB35 09/9A..4	7,5	132M	540	292	404	257	300	194	10	40	SA	177	234
TDB35 10/10A..4	7,5	132M	595	292	404	257	300	194	10	40	SA	188	245
TDB35 11/11A..4	7,5	132M	650	292	404	257	300	194	10	40	SA	198	255
TDB35 12/12A..4	11	160M	705	322	538	314	350	258	10	40	SA	216	290
TDB35 13/13A..4	11	160M	760	322	538	314	350	258	10	40	SA	227	301
TDB35 14/14A..4	11	160M	815	322	538	314	350	258	10	40	SA	237	311
TDB35 15/15A..4	11	160M	870	322	538	314	350	258	10	40	SA	248	322
TDB35 16/16A..4	11	160M	925	322	538	314	350	258	10	40	SA	258	332
TDB35 17/17A..4	15	160M	980	322	538	314	350	258	10	40	SB	269	357
TDB35 18/18A..4	15	160M	1035	322	538	314	350	258	10	40	SB	279	367


Weights refer to Version F (Cast iron)

tdb35-4p50_a_td



TDB58..4 - TDB78..4 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 65	10/16	191	145	118	4	19	24
	25/40	191	145	118	8	19	24
	63	205	160	118	8	23	28
DNA 100	10/16	235	180	156	8	19	27
	25(*)	235	190	156	8	23	27
	ON REQUEST						

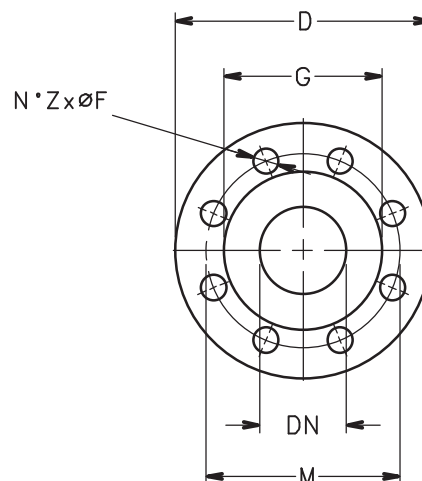

POSITION OF 3-STAGE FLANGES

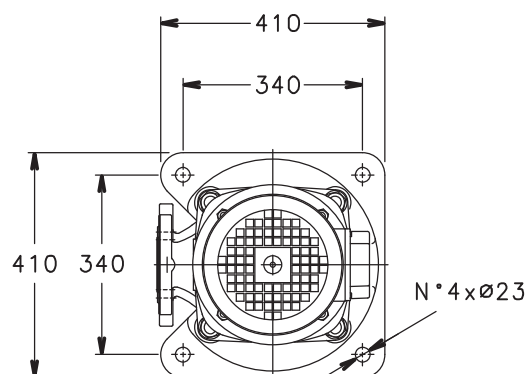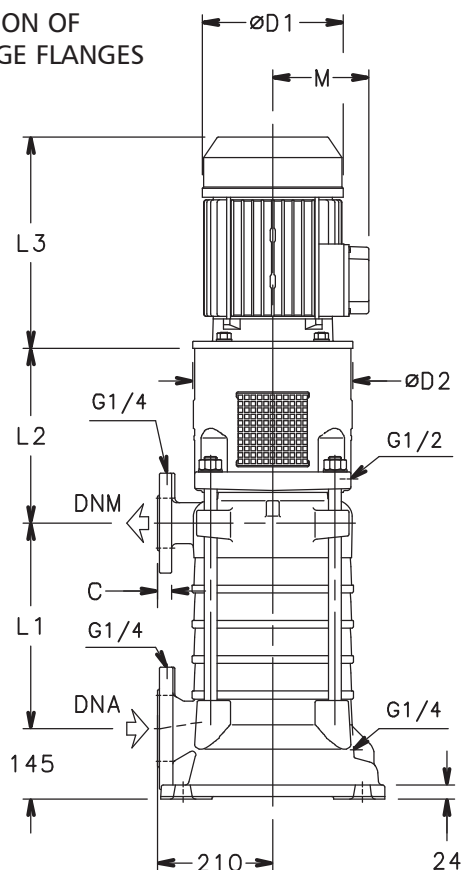

POSITION OF FLANGES UP TO 2 STAGES

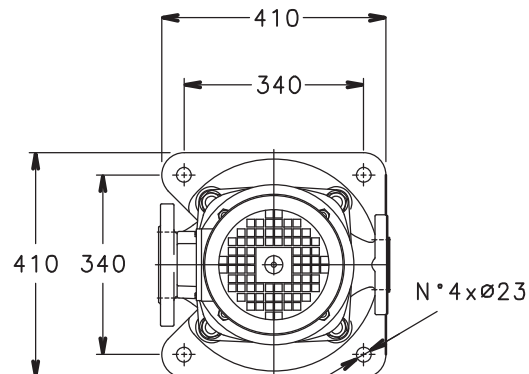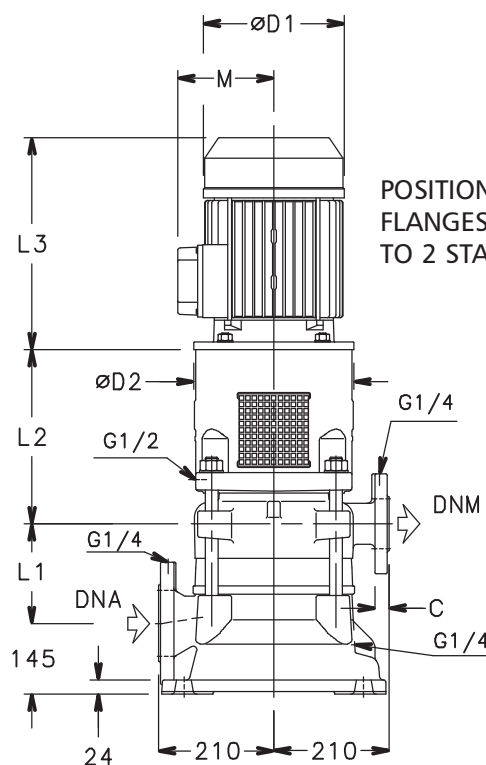

05401_A_DD

TDB58..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB58 01/1A..4	2,2	100La	125	291	307	193	250	133	10	16	SA	130	150
TDB58 02/2A..4	3	100Lb	195	291	307	193	250	133	10	16	SA	147	170
TDB58 03/3A..4	4	112M	265	291	330	220	250	151	10	16	SA	163	195
TDB58 04/4A..4	5,5	132S	335	311	366	257	300	194	10	16	SA	183	227
TDB58 05/5A..4	7,5	132M	405	311	404	257	300	194	10	16	SA	199	256
TDB58 06/6A..4	11	160M	475	341	538	314	350	258	10	16	SA	226	300
TDB58 07/7A..4	11	160M	545	341	538	314	350	258	10	16	SA	242	316
TDB58 08/8A..4	11	160M	615	341	538	314	350	258	10	16	SA	259	333
TDB58 09/9A..4	15	160L	685	341	538	314	350	258	10	16	SA	275	363
TDB58 10/10A..4	15	160L	755	341	538	314	350	258	10	16	SA	292	380
TDB58 11/11A..4	15	160L	825	341	538	314	350	258	10	16	SA	308	396
TDB58 12/12A..4	18,5	180M	895	341	538	314	350	258	10	40	SB	325	425
TDB58 13/13A..4	18,5	180M	965	341	538	314	350	258	10	40	SB	341	441
TDB58 14/14A..4	22	180L	1035	341	613	354	350	278	10	40	SB	358	480

Weights refer to Version F (Cast iron)

tdb58-4p50_a_td

TDB78..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL Type	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB78 01/1A..4	2,2	100La	125	291	307	193	250	133	10	16	SA	130	150
TDB78 02/2A..4	4	112M	195	291	330	220	250	151	10	16	SA	147	179
TDB78 03/3A..4	7,5	132M	265	311	404	257	300	194	10	16	SA	166	223
TDB78 04/4A..4	11	160M	335	341	538	314	350	258	10	16	SA	193	267
TDB78 05/5A..4	11	160M	405	341	538	314	350	258	10	16	SA	209	283
TDB78 06/6A..4	15	160L	475	341	538	314	350	258	10	16	SA	226	314
TDB78 07/7A..4	15	160L	545	341	538	314	350	258	10	16	SA	242	330
TDB78 08/8A..4	18,5	180M	615	341	538	314	350	258	10	16	SA	259	359
TDB78 09/9A..4	18,5	180M	685	341	538	314	350	258	10	16	SA	275	375
TDB78 10/10A..4	22	180L	755	341	613	354	350	278	10	16	SA	292	414
TDB78 11/11A..4	22	180L	825	341	613	354	350	278	10	40	SB	308	430
TDB78 12/12A..4	30	200L	895	341	613	354	400	278	10	40	SB	328	474
TDB78 13/13A..4	30	200L	965	341	613	354	400	278	10	40	SB	344	490
TDB78 14/14A..4	30	200L	1035	341	613	354	400	278	10	40	SB	361	507


Weights refer to Version F (Cast iron)

tdb78-4p50_a_td



TDB120..4 - TDB-TDV170..4 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 100	10/16	235	180	156	8	19	27
	25/40	235	180	156	8	23	27
	63	273	200	156	8	28	32
DNA 125	10/16	279	210	184	8	19	29
	25(*)	279	220	184	8	28	29
	ON REQUEST						

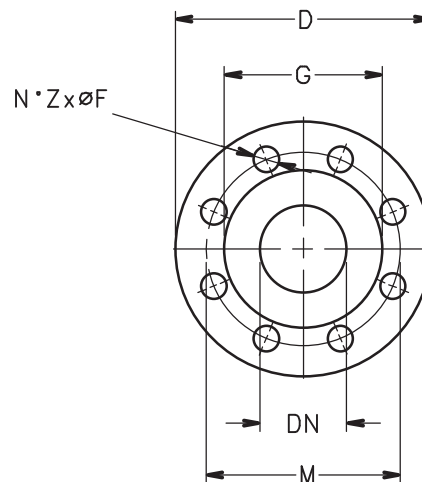

POSITION OF 3-STAGE FLANGES

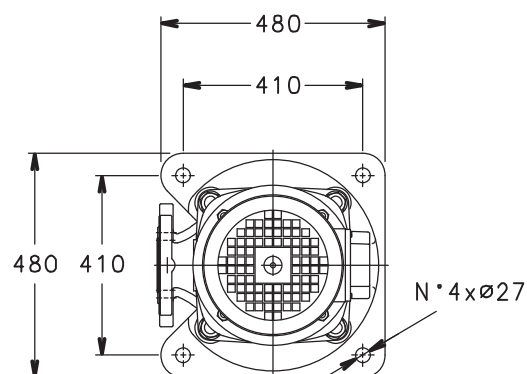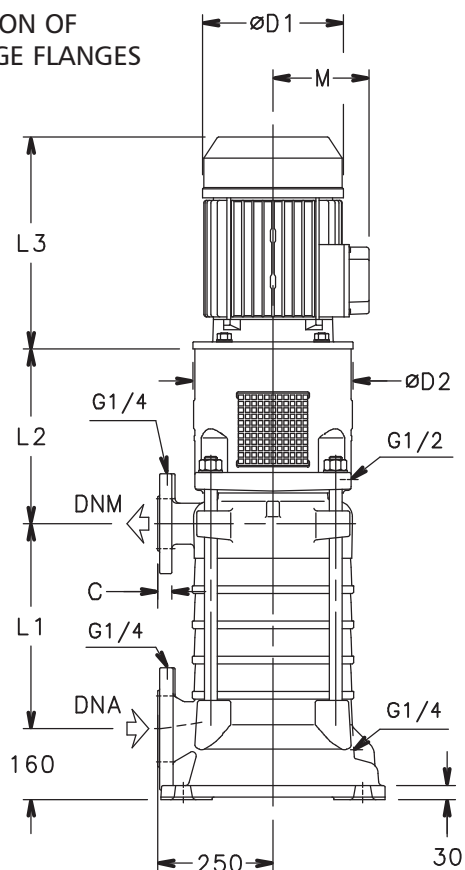

POSITION OF FLANGES UP TO 2 STAGES

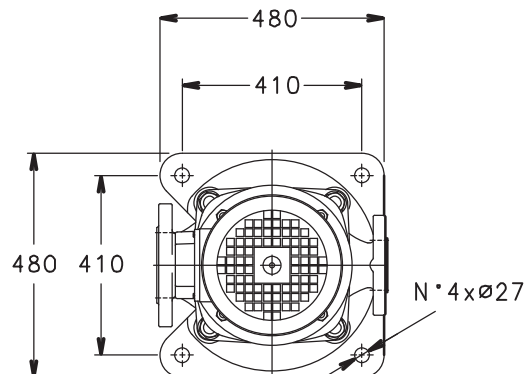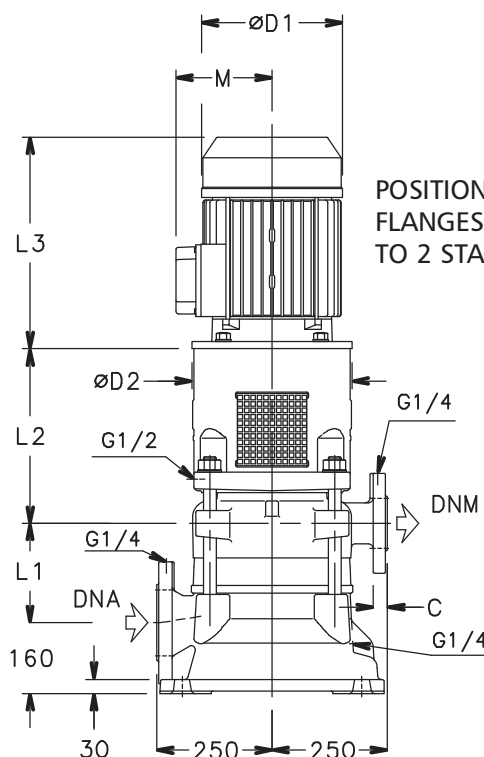

05402_A_DD

TDB120..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB120 01/1C..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB120 01/1B..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB120 01/1A..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB120 02/2B..4	11	160M	260	371	538	314	350	258	10	16	SA	302	376
TDB120 02/2A..4	11	160M	260	371	538	314	350	258	10	16	SA	302	376
TDB120 03/1A2B..4	15	160L	345	371	538	314	350	258	10	16	SA	334	422
TDB120 03/3A..4	15	160L	345	371	538	314	350	258	10	16	SA	334	422
TDB120 04/2A2B..4	18.5	180M	430	371	538	314	350	258	10	16	SA	366	466
TDB120 04/4A..4	18.5	180M	430	371	538	314	350	258	10	16	SA	366	466
TDB120 05/3A2B..4	22	180L	515	371	613	354	350	278	10	16	SA	398	520
TDB120 05/5A..4	22	180L	515	371	613	354	350	278	10	16	SA	398	520
TDB120 06/4A2B..4	30	200L	600	371	613	354	400	278	10	16	SA	431	552
TDB120 06/6A..4	30	200L	600	371	613	354	400	278	10	16	SA	431	577
TDB120 07/5A2B..4	30	200L	685	371	613	354	400	278	10	16	SA	463	609
TDB120 07/7A..4	37	225S	685	401	690	411	450	298	10	16	SA	468	675
TDB120 08/6A2B..4	37	225S	770	401	690	411	450	298	10	40	SB	500	707
TDB120 08/8A..4	37	225S	770	401	690	411	450	298	10	40	SB	500	707
TDB120 09/7A2B..4	45	225M	855	401	690	411	450	298	10	40	SB	532	762
TDB120 09/9A..4	45	225M	855	401	690	411	450	298	10	40	SB	532	762
TDB120 10/8A2B..4	45	225M	940	401	690	411	450	298	10	40	SB	564	794
TDB120 10/10A..4	45	225M	940	401	690	411	450	298	10	40	SB	564	794

Weights refer to Version F (Cast iron)

tdb120-4p50_b_td

TDB-TDV170..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDB170 01/1C..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB170 01/1B..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB170 01/1A..4	11	160M	175	371	538	314	350	258	10	16	SA	270	344
TDB170 02/2B..4	11	160M	260	371	538	314	350	258	10	16	SA	302	376
TDB170 02/2A..4	11	160M	260	371	538	314	350	258	10	16	SA	302	376
TDB170 03/1A2B..4	15	160L	345	371	538	314	350	258	10	16	SA	334	422
TDB170 03/3A..4	18,5	180M	345	371	538	314	350	258	10	16	SA	334	434
TDB170 04/2A2B..4	22	180L	430	371	613	354	350	278	10	16	SA	366	488
TDB170 04/4A..4	30	200L	430	371	613	354	400	278	10	16	SA	367	513
TDB170 05/3A2B..4	30	200L	515	371	613	354	400	278	10	16	SA	399	545
TDB170 05/5A..4	30	200L	515	371	613	354	400	278	10	16	SA	399	545
TDB170 06/4A2B..4	37	225S	600	401	690	411	450	298	10	16	SA	436	643
TDB170 06/6A..4	37	225S	600	401	690	411	450	298	10	16	SA	436	643
TDB170 07/5A2B..4	37	225S	685	401	690	411	450	298	10	16	SA	468	675
TDB170 07/7A..4	45	225M	685	401	690	411	450	298	10	40	SB	468	698
TDB170 08/6A2B..4	45	225M	770	401	690	411	450	298	10	40	SB	500	730
TDB170 08/8A..4	55	250M	770	401	690	411	550	298	10	40	SB	503	767
TDB170 09/7A2B..4	55	250M	855	401	690	411	550	298	10	40	SB	535	799
TDB170 09/9A..4	55	250M	855	401	690	411	550	298	10	40	SB	535	799
TDB170 10/8A2B..4	55	250M	940	401	690	411	550	298	10	40	SB	567	831
TDV170 10/10A..4	75	280S	940	514	819	490	550	360	10	40	SB	611	973

Weights refer to Version F (Cast iron)

tdb-tdv170-4p50_a_td

Tel. 0294-457712 Fax 0294-457713




ITT

POMPODIRECT



TDV220..4, TDV280..4 SERIES **DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

PUMP FLANGES



DN	PN	D	M	G	Z	F	C
DNM 125	10/16	279	210	184	8	19	29
	25/40	279	220	184	8	28	29
	63	330	240	184	8	31	35
DNA 150	10/16	300	240	211	8	23	32
	25(*)	300	250	211	8	28	32
	ON REQUEST						

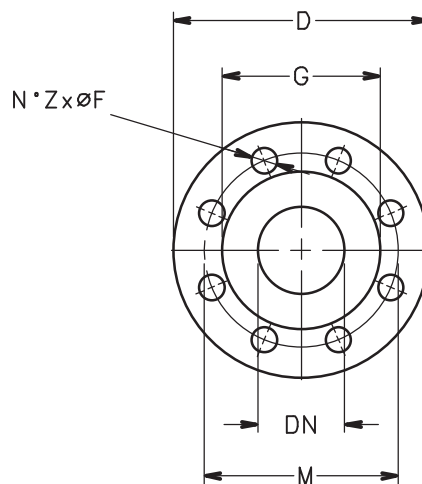

POSITION OF 3-STAGE FLANGES

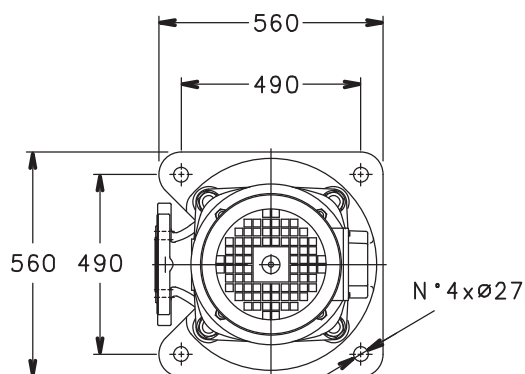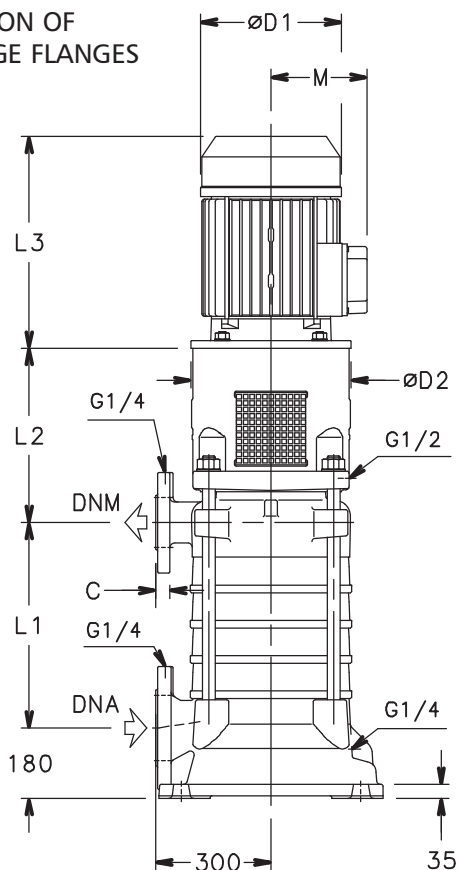

POSITION OF FLANGES UP TO 2 STAGES

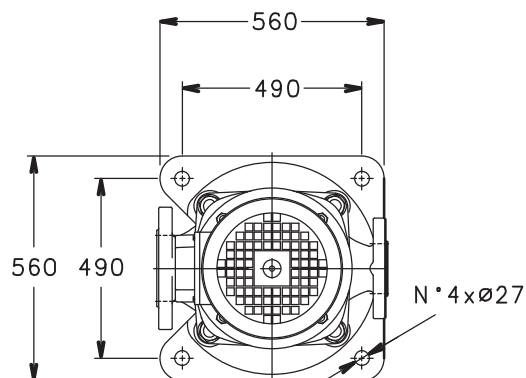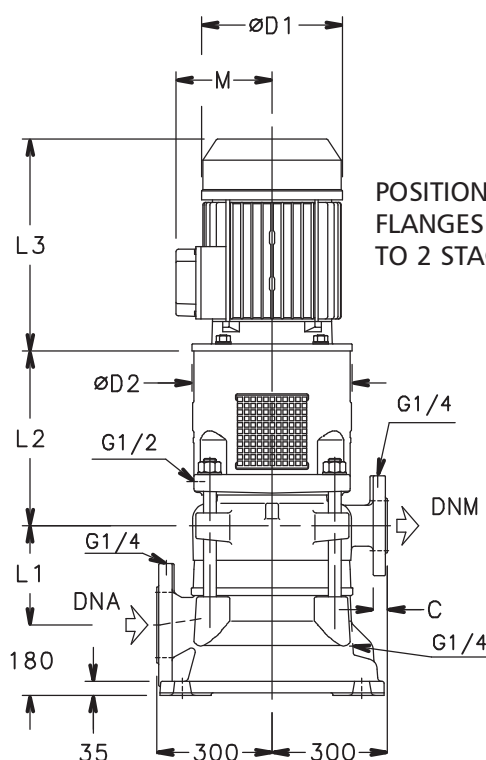

05405_A_DD

Tel. 0294-457712 Fax 0294-457713

TDV220..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDV220 01/1C..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV220 01/1B..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV220 01/1A..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV220 02/2B..4	15	160L	325	567	538	314	350	258	10	16	SA	514	602
TDV220 02/2A..4	22	180L	325	567	613	354	350	278	10	16	SA	514	636
TDV220 03/1A2B..4	30	200L	430	567	613	354	400	278	10	16	SA	569	715
TDV220 03/3A..4	30	200L	430	567	613	354	400	278	10	16	SA	569	715
TDV220 04/2A2B..4	37	225S	535	597	690	411	450	298	10	16	SA	631	838
TDV220 04/4A..4	45	225M	535	597	690	411	450	298	10	16	SA	631	861
TDV220 05/3A2B..4	45	225M	640	597	690	411	450	298	10	16	SA	684	914
TDV220 05/5A..4	55	250M	640	597	690	411	400	298	10	16	SA	693	957
TDV220 06/4A2B..4	55	250M	745	597	690	411	450	298	10	40	SB	746	1010
TDV220 06/6A..4	75	280S	745	597	819	490	550	360	10	40	SB	751	1113
TDV220 07/5A2B..4	75	280S	850	597	819	490	550	360	10	40	SB	804	1166
TDV220 07/7A..4	75	280S	850	597	819	490	550	360	10	40	SB	804	1166
TDV220 08/6A2B..4	75	280S	955	597	819	490	550	360	10	40	SB	857	1219
TDV220 08/8A..4	90	280M	955	597	819	490	550	360	10	40	SB	857	1284

Weights refer to Version F (Cast iron)

tdv220-4p50_a_td

TDV280..4 SERIES

DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

PUMP TYPE	MOTOR		DIMENSIONS (mm)						PN FLANGES		MECH. SEAL	WEIGHT kg	
	kW	Size	L1	L2	L3	D1	D2	M	DNA	DNM	Type	PUMP	ELECTRIC PUMP
TDV280 01/1C..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV280 01/1B..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV280 01/1A..4	11	160M	220	567	538	314	350	258	10	16	SA	461	535
TDV280 02/2B..4	18,5	180M	325	567	538	314	350	258	10	16	SA	514	614
TDV280 02/2A..4	22	180L	325	567	613	354	350	278	10	16	SA	514	636
TDV280 03/1A2B..4	30	200L	430	567	613	354	400	278	10	16	SA	569	715
TDV280 03/3A..4	37	225S	430	597	690	411	450	298	10	16	SA	578	785
TDV280 04/2A2B..4	45	225M	535	597	690	411	450	298	10	16	SA	631	861
TDV280 04/4A..4	45	225M	535	597	690	411	450	298	10	16	SA	631	861
TDV280 05/3A2B..4	55	250M	640	597	690	411	550	298	10	16	SA	693	957
TDV280 05/5A..4	55	250M	640	597	690	411	550	298	10	16	SA	693	957
TDV280 06/4A2B..4	75	280S	745	597	819	490	550	360	10	40	SB	751	1113
TDV280 06/6A..4	75	280S	745	597	819	490	550	360	10	40	SB	751	1113
TDV280 07/5A2B..4	75	280S	850	597	819	490	550	360	10	40	SB	804	1166
TDV280 07/7A..4	90	280M	850	597	819	490	550	360	10	40	SB	804	1231
TDV280 08/6A2B..4	90	280M	955	597	819	490	550	360	10	40	SB	857	1284
TDV280 08/8A..4	90	280M	955	597	819	490	550	360	10	40	SB	857	1284

Weights refer to Version F (Cast iron)

tdv280-4p50_a_td