
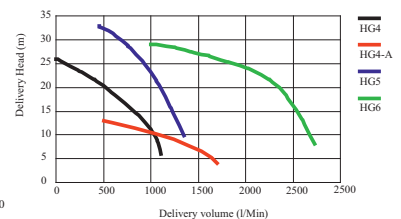




## HEAVY DUTY CAST IRON SELF PRIMING PUMPS ELECTRIC MOTOR DRIVE

MODEL	VOLTAGE	PORT	MAX SOLIDS	KG	H x W x L	LM/HM	kW	CODE	PRICE
B1½KQA EA5V (HGM-1)	230v	1½"	6mm	20.5	285 x 185 x 375	250/16	0.75	070-110	
B2KQA 2757 (HGM-2)	230v	2"	8mm	22	300 x 185 x 410	400/16	1.1	070-112	
B2KQ-A EA3C (HGM-2)	110v	2"	8mm	22	300 x 185 x 410	400/16	1.1	070-114	
B3KQA 1780 (HGM-3)	230v	3"	10mm	31.5	300 x 185 x 445	900/18	2.2	070-116	
B1½KQA EA5Z (HG-1)	415v	1½"	6mm	20.5	285 x 185 x 375	250/16	0.75	070-120	
B2KQA 2761 (HG-2)	415v	2"	10mm	22	300 x 185 x 410	500/18	1.1	070-122	
B3KQA 1226 (HG-3)	415v	3"	10mm	31.5	300 x 185 x 445	850/16	2.2	070-124	
B4KQA 1489 (HG-4A)	415v	4"	20mm	64	400 x 315 x 670	1650/12	4	070-125	
B3XR/A EA7P (HG-4)	415v	3"	12mm	65.5	405 x 280 x 650	1100/26	5.5	070-126	
B3XR/A EAL1 (HG-5)	415v	3"	15mm	71.5	405 x 280 x 650	1300/32	7.5	070-128	
EAG5 (HG-6)	415/690v	4"	25mm	115	455 x 365 x 800	2600/30	15	070-130	

Self priming electric pump with multi blade impeller, suitable for pumping clean or slightly dirty water. Not suitable for pumping abrasives. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 70°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Carbon mechanical seal. High pressure versions are available upon request.



## TRASH DUTY, SELF PRIMING AND SOLIDS HANDLING REMOVABLE INSPECTION COVER, SIC SEAL AND REPLACEABLE WEAR PLATE

MODEL	VOLTAGE	PORT	MAX SOLIDS	KG	H x W x L	LM/HM	kW	CODE	PRICE
B1½KQA-ST EA6E (HGM1-ST)	230v	1½"	12mm	21	285 x 185 x 375	270/12	0.75	070-001	
B2KQA-ST EAR3 (HGM2-ST)	230v	2"	14mm	24.5	300 x 185 x 375	450/17	1.5	070-002	
B3KQA-ST EAR5 (HGM3-ST)	230v	3"	26mm	32	300 x 185 x 445	750/17	2.2	070-003	
B2KQA-ST EAR4 (HG2T-ST)	415v	2"	14mm	24.5	300 x 185 x 375	750/17	1.5	070-004	
B3KQA-ST EAR6 (HG3T-ST)	415v	3"	26mm	32	300 x 185 x 445	900/15	2.2	070-005	

Self priming electric pump with three blade impeller, suitable for pumping dirty water. This version is provided with an inspection door to remove any blockages that may occur, a wear disc made from stainless steel. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 70°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Silicon carbide seal. High pressure versions are available upon request.

