

**JS SEWAGE PUMPS – SINGLE PHASE**  
SV VERSIONS – VORTEX IMPELLER

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JS-400 SV MAN 230v 2"	17	460 x 145 x 215	240/8	0.4	012-410	
JS-400 SV AUTO 230v 2"	17	460 x 145 x 215	240/8	0.4	012-410A	
JS-400 SV MAN 110v 2"	17	460 x 145 x 215	240/8	0.4	012-414	
JS-400 SV AUTO 110v 2"	17	460 x 145 x 215	240/8	0.4	012-414A	
JS-650 SV MAN 230v 2"	21	480 x 160 x 230	300/15	0.75	011-700	
JS-650 SV AUTO 230v 2"	21	480 x 160 x 230	300/15	0.75	011-700A	
JS-650 SV MAN 110v 2"	21	480 x 160 x 230	300/15	0.75	011-702	
JS-650 SV AUTO 110v 2"	21	480 x 160 x 230	300/15	0.75	011-702A	
JS-750 SV MAN 230v 3"	32	530 x 165 x 345	500/9	0.75	012-751	
JS-750 SV AUTO 230v 3"	32	530 x 165 x 345	500/9	0.75	012-751A	
JS-750 SV MAN 110v 3"	32	530 x 165 x 345	500/9	0.75	012-754	
JS-750 SV AUTO 110v 3"	32	530 x 165 x 345	500/9	0.75	012-754A	
JS-1500 SV MAN 230v 3"	44	610 x 190 x 370	750/10	1.5	011-768	
JS-1500 SV AUTO 230v 3"	44	610 x 190 x 370	750/10	1.5	011-768A	



JS-400 SV MANUAL




JS-400 SV AUTO



JS-750 SV




SR-50H



SR-80

**AUTOMATIC PUMPS ARE FITTED WITH MAC3 FLOATS**  
ALLOW APPROX 300MM AWAY FROM PUMP FOR FLOAT SWITCH TO OPERATE

JS-SV series are submersible sewage vortex impeller pumps allowing soft solids to be passed through the pump body to waste. Available as standard as free standing or can be guide rail mounted. See below for guide rail prices. Cast iron pump body, impeller, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable. Hose tails are supplied with all models. JS-400/650sv – 36mm solids handling. JS-750sv – 46mm solids handling. JS-1500sv – 65mm solids handling.

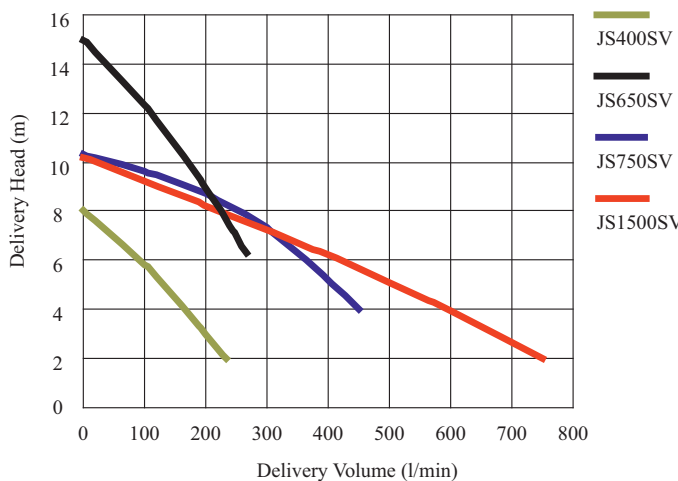

**GUIDE RAIL SETS**  
DIMENSIONS ON PAGE 18

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50H	2"	020-501H	
JS-3" SR-80	3"	020-504	

FOR CONTROL PANELS AND FLOAT SWITCHES PLEASE SEE PAGES 26 - 29

**JST SEWAGE PUMPS – 415v 3-PHASE  
SV VERSIONS – VORTEX IMPELLER**

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JST-4 SV 2"	15.4	415 x 140 x 215	240/8	0.4	012-698	
JST-8 SV 3"	29.4	470 x 170 x 345	550/9	0.75	012-768	
JST-15 SV 3"	36.6	515 x 170 x 395	700/10	1.5	012-774	
JST-22 SV 3" 2 POLE	52.2	580 x 210 x 430	900/11	2.2	011-026	
JST-22 SV 3" 4 POLE	59.6	650 x 255 x 480	1400/8	2.2	011-025	
JST-37 SV 3"	61.2	660 x 255 x 480	1400/14	3.7	011-040	
JST-55 SV 4"	99.6	830 x 310 x 650	2600/12	5.5	012-788	
JST-75 SV 4"	110	830 x 310 x 650	3000/17	7.5	012-792	




JST-SV versions are submersible sewage vortex impeller pumps allowing soft solids to be passed through the pump body to waste. Available as free standing as standard or can be guide rail mounted. See bottom of page for guide rail prices. Cast iron pump body, impeller, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable. Hose tails are supplied up to model JST-37 SV. JST-4 SV – 36mm solids handling, JST-08 SV – 36mm, JST-15 SV – 46mm, JST-22 SV – 65mm, JST-37 SV – 57mm, JST55 SV & 75SV – 80mm solids handling.



JST-4 SV



JST-15 SV

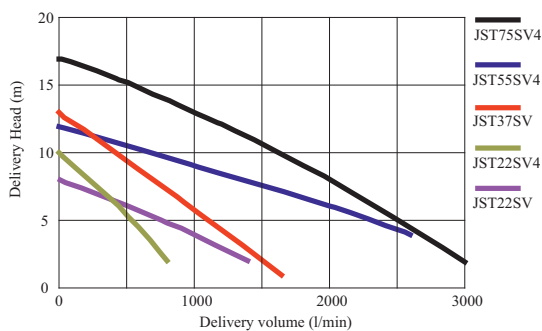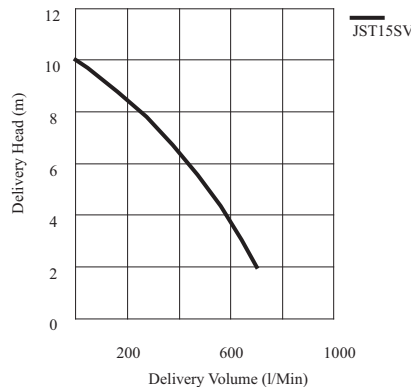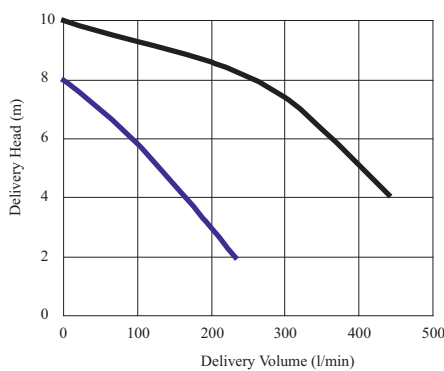

SR-50H



SR-80/100

All models can be made to operate automatically, see pages 26 & 27 for control panels and pages 28 & 29 for float switches.

**GUIDE RAIL SETS  
DIMENSIONS ON PAGE 18**

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50H	2"	020-501H	
JS-3" SR-80	3"	020-504	
JS-4" SR-100	4"	020-506	

FOR CONTROL PANELS AND FLOAT SWITCHES PLEASE SEE PAGES 26 - 29