


JS SEWAGE PUMPS – SINGLE PHASE
SK VERSIONS – SINGLE CHANNEL CUTTER IMPELLER

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JS-750 SK MAN 230v 2"	29.4	530 x 190 x 310	400/14	0.75	012-757	
JS-750 SK AUTO 230v 2"	29.4	530 x 190 x 310	400/14	0.75	012-757A	
JS-750 SK MAN 110v 2"	29.4	530 x 190 x 310	400/14	0.75	012-758	
JS-750 SK AUTO 110v 2"	29.4	530 x 190 x 310	400/14	0.75	012-758A	
JS-1500 SK MAN 230v 3"	36.4	580 x 240 x 360	800/16	1.5	011-776	
JS-1500 SK AUTO 230v 3"	36.4	580 x 240 x 360	800/16	1.5	011-776A	

AUTOMATIC PUMPS ARE FITTED WITH MAC3 FLOATS
ALLOW APPROX 300MM AWAY FROM PUMP FOR FLOAT SWITCH TO OPERATE

JS-SK series are submersible sewage cutter impeller pumps. Available as standard as free standing or can be guide rail mounted. See below for guide rail prices.
 Single channel tungsten carbide tipped impeller capable of cutting soft solids into smaller parts to pump through the body to waste. Cast iron pump body, volute stand, impeller, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing.
 Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber.
 Complete with 10 metres of power cable. Hose tails are supplied with all models.

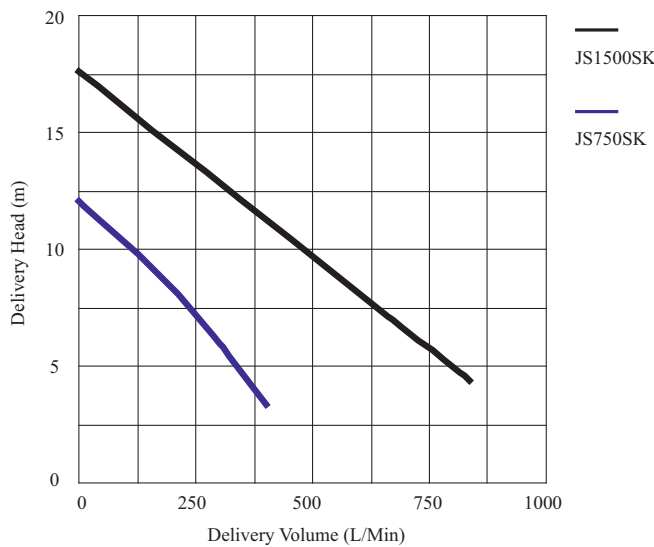

JS-750 SK MAN



JS-750 SK AUTO



SR-50



SR-80

GUIDE RAIL SETS
DIMENSIONS ON PAGE 18

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50S	2"	020-501S	
JS-3" SR-80	3"	020-504	

FOR CONTROL PANELS AND FLOAT SWITCHES PLEASE SEE PAGES 26 - 29


**JST SEWAGE PUMPS – 415v 3-PHASE
SK VERSIONS – SINGLE CHANNEL CUTTER IMPELLER**

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JST-8 SK 2"	27.8	465 x 195 x 315	400/14	0.75	012-780	
JST-15 SK 3"	37.6	515 x 240 x 375	800/17	1.5	012-782	
JST-22 SK 3"	49.8	565 x 240 x 405	1000/20	2.2	012-784	
JST-37 SK 4"	55	610 x 250 x 405	1200/25	3.7	012-786	
JST-55 SK 4"	76	730 x 420 x 740	1800/19	5.5	012-790	
JST-75 SK 4"	86	750 x 420 x 740	2200/22	7.5	012-796	




JST-15 SK

JST-SK series are submersible sewage cutter impeller pumps. Available as standard as free standing or can be guide rail mounted. See below for guide rail prices.
Single channel tungsten carbide tipped impeller capable of cutting soft solids into smaller parts to pump through the body to waste. Cast iron pump body, volute stand, impeller, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable.
Hose tails are supplied with all models apart from the JST-37, 55 and 75 SK.

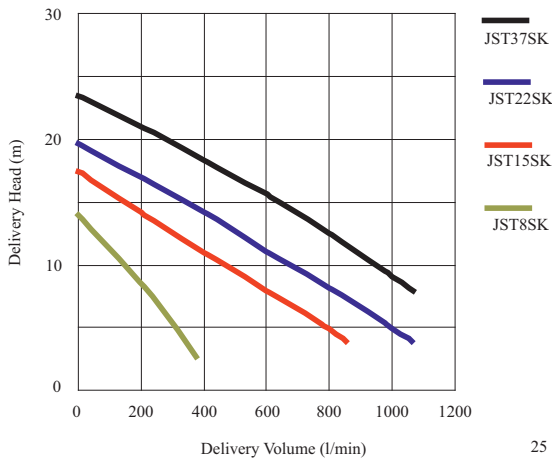

JST-55 SK

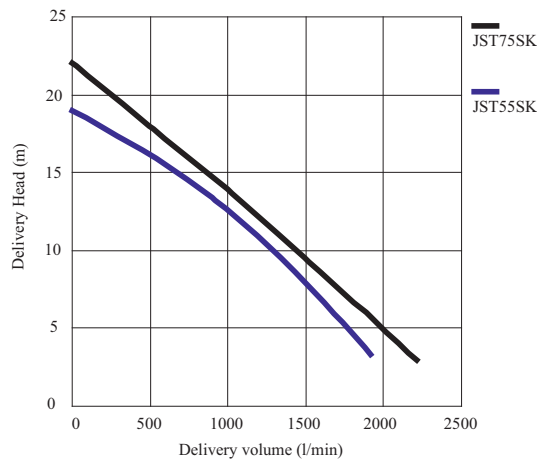

SR-50



SR-80/100

All models can be made to operate automatically, see pages 26 & 27 for control panels and pages 28 & 29 for float switches.

**GUIDE RAIL SETS
DIMENSIONS ON PAGE 18**

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50S	2"	020-501S	
JS-3" SR-80	3"	020-504	
JS-4" SR-100	4"	020-506	

FOR CONTROL PANELS AND FLOAT SWITCHES PLEASE SEE PAGES 26 - 29