



## ■ MODEL SKSS-SERIES

316 stainless steel construction.

Double mechanical seals.

Class F motor insulation.

Shaft sleeve saves on shaft wear due to abrasives and corrosion.

Additional lip seal protection keeps impurities and abrasives away from the mechanical seals.

Thermal overload protection guards against high amperage and high temperature.

Available with slide rail system to save maintenance cost and time.

Enhanced cable entry sealing system.



JS750SKSS

## ■ APPLICATIONS

Suitable for:

Clean water

Waste water

Agriculture waste water

Industrial waste water

Corrosive waste water




Light chemicals

Salt water



JST37SKSS

### ■ PERFORMANCE CURVE

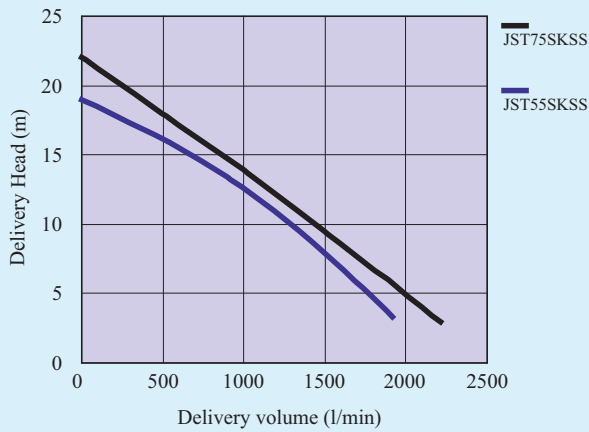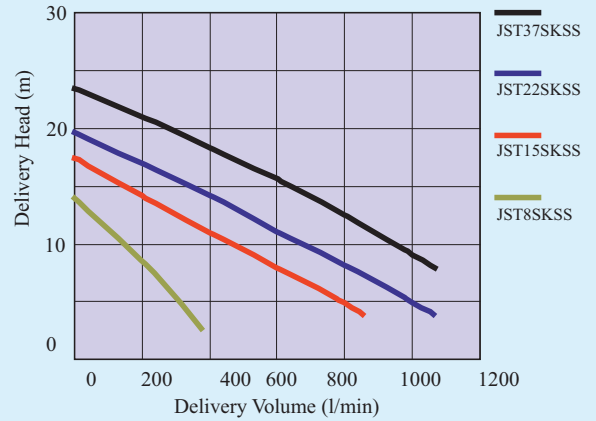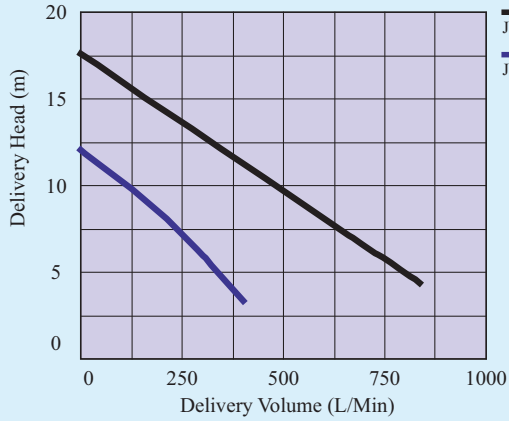

### ■ SPECIFICATIONS

Pump Type	Outlet Diameter Inch (mm)	Output KW	Voltage 50Hz	Max.			Weight KG
				Head M	Capacity l/min	Solids (mm)	
JS-750SKSS	2" (50)	0,75	1 Phase 230v	14	400	21	29
JS-1500SKSS	3" (75)	1,50		16	800	44	36
JST-08SKSS	2" (50)	0,75	3 Phase 400v	14	400	21	28
JST-15SKSS	3" (75)	1,50		17	800	44	38
JST-22SKSS	3" (75)	2,20		20	1000	44	50
JST-37SKSS	4" (100)	3,70		24	1100	35	55
JST-55SKSS	4" (100)	5,50		19	1800	55	76
JST-75SKSS	4" (100)	7,50		22	2200	55	86